

533024

Product Sheet

ares


THE OUTDOOR BY FLOS

ARES s.r.l - Socio Unico
v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)
www.aresill.net - flos.outdoor@flos.com

Anna

Outdoor / Indoor round luminaire for installation on ceiling or wall surface-mounted.
Configuration: opal plastic diffuser with satin finish for a high light emission uniformity ratio.
Die-cast aluminium fixing back-plate and turned aluminium structure and heat sink.
Magnetic finish frame to hide the fixing screws. The luminaire is coated with polyester powders in single or double colour. Protection rating: IP65 In compliance with EN 60598-1 standards Class of Insulation: I Installation: the luminaire is equipped with two IP65 cable holders for rubber cables 5ϕ<math><10\text{mm}</math> (Anna $\phi 210$ and $\phi 310$) or cables 6ϕ<math><13\text{mm}</math> (Anna $\phi 410$) and a quick-connect 2-pole terminal block. Outdoor installation requires suitable flexible cables assuring the watertightness of the cable holder.

Anna410 Mid-Power LED / Bicolor Structure White-Orange

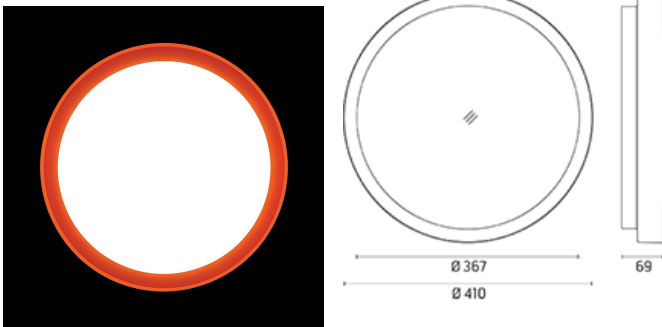

Product Code Details

533024

Light Source



NATURAL WHITE 4000K MID-POWER LEDs 27,9W/110=240V
Total power 34W
LED lm 4318 ÷ OUTPUT lm 2340
CRI>80
Integral electronic power supply
Dimmable on request



IP65

Warnings

Decorative



Ceiling fitting



The fitting is equipped with 2 cable input.



Protection against impact.
IK 08 - 05,00 joule



Wall fitting

Wall/Ceiling



Ceiling fitting



The fitting is equipped with 2 cable input.



Protection against impact.
IK 08 - 05,00 joule



Wall fitting

Light Flux, Placement





Code: 237
SPD: (Surge Protection Device) 275Vac
Maximum discharge current 10KA (8/20 μ s)
Maximum operating current 5A
Suitable for series connection - IP66