

013315

Product Sheet

ares

THE OUTDOOR BY FLOS

ARES s.r.l - Socio Unico

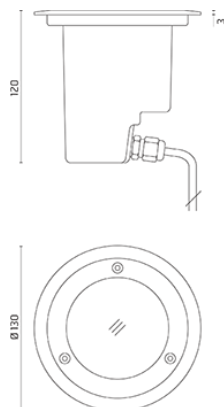
v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)

www.aresill.net - flos.outdoor@flos.com

Clio

Round luminaire for installation on wall or ground - recessed. Configuration: die-cast aluminium structure, EN AB- 47100 alloy (low copper content) and aluminium or AISI 316L stainless steel frame. Glass diffuser: transparent or sandblasted. Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP67 In compliance with EN 60598-1 standards Class of insulation: mains: I; low voltage: III Installation: the luminaire is equipped with a piece of cable with a 2-way connector for 3-conductor cables (H2O STOP) for an easy-to-make connection. Outdoor use requires suitable flexible cables. Installation requires a dedicated box to be ordered separately. It is important to provide a >300mm gravel layer or a drain system (for concrete surface) to ensure good drainage and to avoid water stagnation. We recommend the use of a connection system with a protection degree greater than or equal to the protection degree of the luminaire.

Clio / Ø 130mm - Stainless Steel Frame - Transparent Glass - Adjustable Optic

IP67   

Available Colors for this Version



0. Inox

Warnings

Ground Recessed



Installation requires a 30 cm
water drainage layer (gravel)



Pre-wired with approx
250mm of cable.



Protection against impact.
IK 09 - 10,00 joule



Recessed ground fitting



Do not install in hollow areas



Protection against water
ingress from the cable



Static load: 1000Kg walk
over (Ø 120mm version)
Static load: 1500Kg walk
over (Ø 130mm version)



Check that difuser's
temperature 'T max °C'
(tested at 25°C) complies
with your local regulation.



Remote device required for
12V versions

Light Flux, Placement



013315

Light Source



QR CBC 51 50W/12V GU5,3
T 180°C
Remote transformer to be ordered





Code: 20
Box for installation
Ø 175 H 152 mm



Code: 215
3/4 way terminal block 3 poles IP68
(Ø 5,5÷12 mm cable)



Code: 16
Transformer 50W
230V/12V 50Hz
IP 66



Code: 17
Transformer 200W
230V/12V 50Hz
IP 66



Code: 18
Transformer 300W
230V/12V 50Hz
IP 66