1162842

Product Sheet




ARES s.r.l - Socio Unico

v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy) www.aresill.net - flos.outdoor@flos.com

Emma ø70

Luminaire for installation on wall - surface mounted. Configuration: die-cast aluminium structure, EN AB-47100 alloy (low copper content). Glass diffuser: transparent. Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders that are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components that have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP54. In compliance with EN 60598-1 standards. Class of insulation: mains: I; dichroic bulb and LED module: II. Installation: wiring through one cable holder (5mm<0-10mm cables). Outdoor use requires suitable flexible cables assuring the watertightness of the cable

Emma70 / Bidirectional



Product Code Details

1162842

Light Source




PAR 16 2x50W/230V GZ10



IP54 ♥ ⊕ C€

Available Colors for this Version

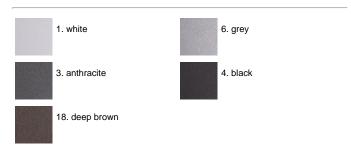

Warnings

Wall



Wall fitting



The fitting is equipped with 1 cable input



Protection against impact. IK 06 - 1,00 joule

Light Flux, Placement





This product has no accessories