

544001

Product Sheet

ares
THE OUTDOOR BY FLOS


ARES s.r.l - Socio Unico
v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)
www.aresill.net - flos.outdoor@flos.com

Giulia


Round luminaire for installation on wall or ceiling - surface mounted. Configuration: die-cast aluminium structure and frame, EN AB-47100 alloy (low copper content). Polycarbonate diffuser: opal with satin finish. Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders that are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components that have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP65 In compliance with EN60598-1 standards Class of insulation: I Installation: the luminaire is equipped with two cable holders and a three-pole quick-connection terminal. Giulia Ø200 and Ø300: 5mm< Ø <10mm cables. Giulia Ø400: 6mm< Ø <13mm cables. Outdoor use requires suitable flexible cables assuring the watertightness of the cable holder.

IP65   CE

Available Colors for this Version

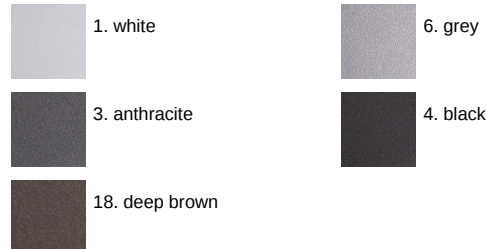

Giulia200 Mid-Power LED

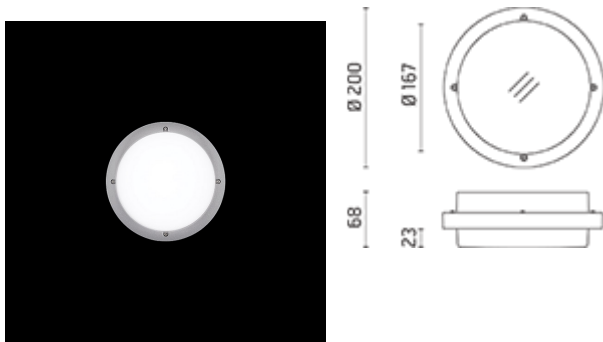

Warnings

Wall/Ceiling



Ceiling fitting



Wall fitting



The fitting is equipped with 2 cable input.



Protection against impact.
IK 08 - 05,00 joule

Light Flux, Placement



Product Code Details

544001

Light Source



NATURAL WHITE 4000K MID-POWER LEDs 8,7W/220÷240V

Total power 11W

LED lm 1325 ÷ OUTPUT lm 802

CRI>80

Integral electronic power supply



Accessories



Code: 237

SPD: (Surge Protection Device) 275Vac

Maximum discharge current 10kA (8/20μs)

Maximum operating current 5A

Suitable for series connection - IP66