

# 544005

Product Sheet

**ares**  
THE OUTDOOR BY FLOS


ARES s.r.l - Socio Unico  
v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)  
www.aresill.net - flos.outdoor@flos.com

## Giulia


Round luminaire for installation on wall or ceiling - surface mounted. Configuration: die-cast aluminium structure and frame, EN AB-47100 alloy (low copper content). Polycarbonate diffuser: opal with satin finish. Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders that are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components that have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP65 In compliance with EN60598-1 standards Class of insulation: I Installation: the luminaire is equipped with two cable holders and a three-pole quick-connection terminal. Giulia Ø200 and Ø300: 5mm <math>\varnothing</math> <math><10\text{mm}</math> cables. Giulia Ø400: 6mm <math>\varnothing</math> <math><13\text{mm}</math> cables. Outdoor use requires suitable flexible cables assuring the watertightness of the cable holder.

IP65   

### Available Colors for this Version

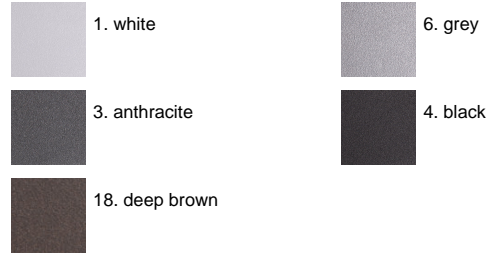

### Giulia400 Mid-Power LED

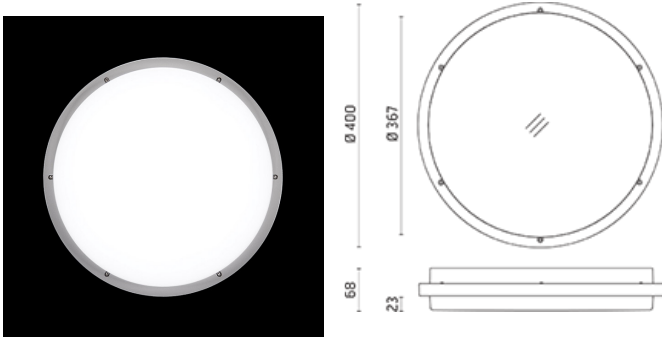

### Warnings

#### Wall/Ceiling



Ceiling fitting



Wall fitting



The fitting is equipped with 2 cable input.



Protection against impact. IK 08 - 05,00 joule

### Light Flux, Placement



### Product Code Details

## 544005

Light Source



NATURAL WHITE 4000K MID-POWER LEDs 27,9W/220-240V

Total power 34W

LED lm 4318 ÷ OUTPUT lm 2340

CRI>80

Integral electronic power supply

Dimmable on request





Code: 237  
SPD: (Surge Protection Device) 275Vac  
Maximum discharge current 10KA (8/20 $\mu$ s)  
Maximum operating current 5A  
Suitable for series connection - IP66