

544006

Product Sheet

ares

THE OUTDOOR BY FLOS

ARES s.r.l - Socio Unico
v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)
www.aresill.net - flos.outdoor@flos.com

Giulia


Round luminaire for installation on wall or ceiling - surface mounted. Configuration: die-cast aluminium structure and frame, EN AB-47100 alloy (low copper content). Polycarbonate diffuser: opal with satin finish. Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders that are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components that have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP65 In compliance with EN60598-1 standards Class of insulation: I Installation: the luminaire is equipped with two cable holders and a three-pole quick-connection terminal. Giulia Ø200 and Ø300: 5mm \varnothing <math><10\text{mm}</math> cables. Giulia Ø400: 6mm \varnothing <math><13\text{mm}</math> cables. Outdoor use requires suitable flexible cables assuring the watertightness of the cable holder.

IP65   

Available Colors for this Version



Giulia400 Mid-Power LED

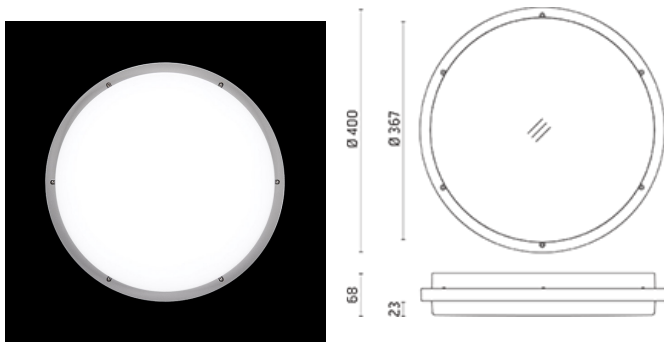

Warnings

Wall/Ceiling



Ceiling fitting



Wall fitting



The fitting is equipped with 2 cable input.



Protection against impact. IK 08 - 05,00 joule

Light Flux, Placement



Product Code Details

544006

Light Source



WARM WHITE 3000K MID-POWER LEDs 27,9W/220÷240V

Total power 34W

LED lm 4109 ÷ OUTPUT lm 2232

CRI>80

Integral electronic power supply

Dimmable on request



Accessories



Code: 237
SPD: (Surge Protection Device) 275Vac
Maximum discharge current 10KA (8/20 μ s)
Maximum operating current 5A
Suitable for series connection - IP66