

527013

Product Sheet

ares
THE OUTDOOR BY FLOS

ARES s.r.l - Socio Unico
v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)
www.aresill.net - flos.outdoor@flos.com

Hyperion


Rectangular luminaire for installation on wall - surface mounted. Configuration: die-cast aluminium structure, EN AB- 47100 alloy (low copper content), stainless steel bracket and transparent polycarbonate emitting unit. Optional accessory: aluminium reflector (fixed by a double-sided technical tape) Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders that are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components that have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP65 In compliance with EN60598-1 standards Class of insulation: II; 24V version: III Installation: the luminaire is equipped with a piece of neoprene cable (approx. 200mm) for an easy-to-make connection. Direct screwing on surface through the stainless steel bracket. We recommend the use of a connection system with a protection degree greater than or equal to the protection degree of the luminaire.

IP65  

Available Colors for this Version



Hyperion Mid-Power LED

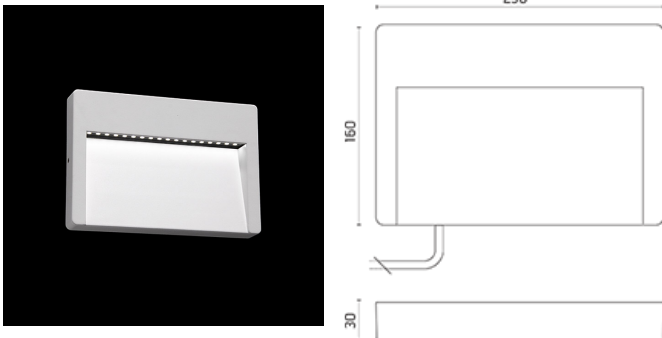

Product Code Details

527013

Light Source



WARM WHITE 3000K MID-POWER LEDs 6W/24Vdc
Total power 7,5W
LED lm 795 ÷ OUTPUT lm 398
CRI >80

Remote electronic power supply to be ordered
Dimmable on request, acc.: 144,176



Warnings

Wall



Bollard



Light Flux, Placement



Accessories



Code: 160
Satin aluminium carter
Thickness 0.5 mm



Code: 87
Supported n. of lamps: 1
Power supply
10W/110÷240V - 24Vdc
IP20 CLASS II SELV.



Code: 175
Supported n. of lamps: 1
Power supply
10W/110÷240V - 24Vdc
IP67 CLASS II SELV.



Code: 144
Supported n. of lamps: 2
Power supply
17W/110÷240V - 24Vdc
(15W@110V) IP20 CLASS II SELV.



Code: 176
Supported n. of lamps: 2
Power supply
17W/110÷240V - 24Vdc
(15W@110V) IP67 CLASS II SELV.



Code: 147
Supported n. of lamps: 2
Power supply
20W/220÷240V - 24Vdc
IP67 CLASS II SELV.



Code: 155
Supported n. of lamps: 6
Power supply
50W/120÷240V - 24Vdc
IP67 CLASS II SELV.



Code: 110
Supported n. of lamps: 9
Power supply
70W/220÷240V - 24Vdc
IP67 CLASS II SELV EQ.



Code: 156
Supported n. of lamps: 12
Power supply
100W /120÷240V - 24Vdc
IP67 CLASS II SELV.



Code: 245
Pole
H 500 mm