

8412801

Product Sheet

ares

THE OUTDOOR BY FLOS

ARES s.r.l - Socio Unico
v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)
www.aresill.net - flos.outdoor@flos.com

Jackie


Luminaire for installation on wall - surface mounted. Configuration: die-cast aluminium structure, EN AB-47100 alloy (low copper content). Glass diffuser: transparent. Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders that are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components that have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP54. In compliance with EN 60598-1 standards. Class of insulation: mains I; low voltage: III. Installation: wiring through a rubber cable holder (5mm-Ø<10mm cables). Outdoor use requires suitable flexible cables assuring the watertightness of the cable holder.

IP54   

Available Colors for this Version



Jackie CoB LED / Transparent Glass - Narrow Beam 40°-Direct 230V

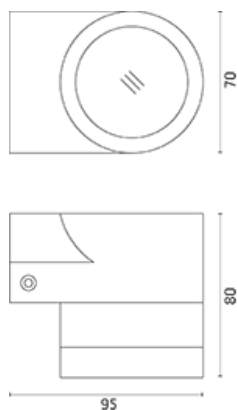

Warnings

Wall



Wall fitting



Remote device required for
12V versions



The fitting is equipped with 1
cable input



Protection against impact.
IK 08 - 05,00 joule

Light Flux, Placement



Product Code Details

8412801

Light Source



WARM WHITE 3000K CoB LED 5W/220÷230V

Total power 6W

LED lm 688 ÷ OUTPUT lm 327

CRI>80

Led module set up to work directly connected to the mains



Accessories



Code: 237
SPD: (Surge Protection Device) 275Vac
Maximum discharge current 10KA (8/20 μ s)
Maximum operating current 5A
Suitable for series connection - IP66