

# 524504

Product Sheet


**ares**  
THE OUTDOOR BY FLOS

ARES s.r.l - Socio Unico  
v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)  
www.aresill.net - flos.outdoor@flos.com

## K12

Square luminaire for installation in wall and ground - recessed. Configuration: die-cast aluminium structure, EN AB-47100 alloy (low copper content). Glass diffuser fixed to the aluminium body through a robotic gluing system. Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP67 In compliance with EN 60598-1 standards Class of insulation: III Installation: the luminaire is equipped with 300mm of cable for a quick connection. K12 Power LED is equipped with a dc/dc highly efficient converter that removes electromagnetic interference and allows parallel wiring. The whole range is protected against polarity reversal and sudden voltage peak. Outdoor use requires suitable flexible cables. Installation requires a dedicated box to be ordered separately. It is important to provide a >200mm gravel layer or a drain system (for concrete surface) to ensure good drainage and to avoid water stagnation. We recommend the use of a connection system with a protection degree greater than or equal to the protection degree of the luminaire.

### K12rc RGB Low Power LED / Diffused light

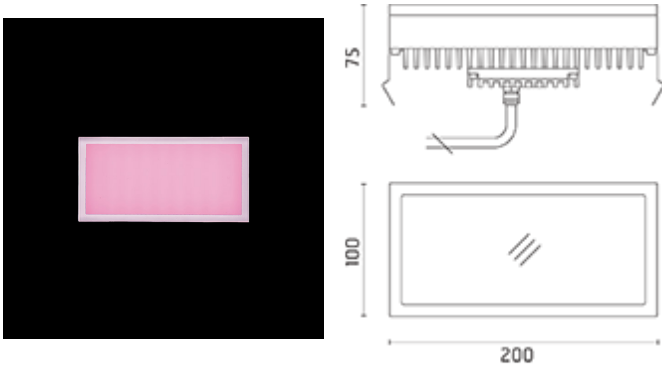

### Product Code Details

## 524504

Light Source



RGB LOW POWER LEDs 10W/3CH 24Vdc  
Total power 10,5W  
Remote electronic power supply to be ordered



IP67

### Warnings

#### Ground Recessed

- Recessed ground fitting
- Do not install in hollow areas
- Pre-wired with approx 300mm of cable.
- Remote device required
- Glass surface temperature
- Installation requires a 30 cm water drainage layer (gravel)
- Static load: 1500Kg walk over
- Protection against impact. IK 10 - 20,00 joule

#### Wall Recessed


- Pre-wired with approx 300mm of cable.
- Remote device required
- Recessed wall fitting
- Protection against impact. IK 10 - 20,00 joule

### Light Flux, Placement



## Accessories

---



Code: 152  
Box for installation  
220 x 120 x H 95 mm



Code: 153  
Suction cup to pull the luminaire



Code: 148  
Supported n. of lamps: 4  
Power supply with DMX interface for RGB fixtures  
55W/220÷230V-3CHx24Vdc  
(3CHx18W) DMX controller allowed  
IP67 CLASS I SELV EQ.



Code: 142  
DMX Controller  
Dimmer switch for recessed box (60 mm hole centres)



Code: 143  
DMX Controller  
Stand-alone/PC interface



Code: 186  
DMX cable  
Shielded twisted pair with 110 Ohm constant impedance



Code: 187  
DMX splitter  
Electronic device to regenerate the DMX signal.  
1 input and 7 output. 12÷24Vdc  
Power supply to be ordered (87 or 175 recommended)