

540003

Product Sheet

ares

THE OUTDOOR BY FLOS

ARES s.r.l - Socio Unico


v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)

www.aresill.net - flos.outdoor@flos.com

Kirk

Adjustable projector for installation on ceiling, wall or floor. Configuration: die-cast aluminium structure, EN AB-47100 alloy (low copper content) and AISI 316L fixing plate. Glass diffuser: extra clear with silkscreen border, fixed to the aluminium through a robotic gluing system. The wiring unit and the emitting unit are connected by an adjustable junction. Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sand-blasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP65. In compliance with EN60598-1 standards. Class of insulation: I. Installation: the luminaire is for direct connection to 220- 230V with a LED module set to work directly connected to the mains. The luminaire is equipped with an AISI316L stainless steel fixing plate for installation on surface and IP68 connector (6\varnothing<math><8\text{mm}</math> cable). Ground spike available on request.

Kirk120 CoB LED / Adjustable - Medium Beam 40°



Product Code Details

540003

Light Source



WARM WHITE 3000K CoB LED 22W/220÷230V

Total power 24W

LED lm 2303 ÷ OUTPUT lm 1610


CRI >80

Led module set up to work directly connected to the mains



IP65   

Available Colors for this Version

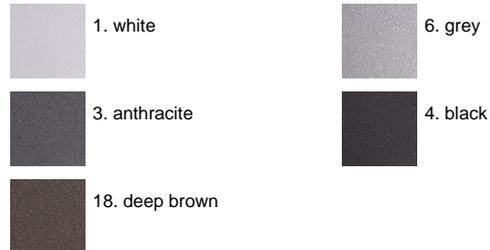

Warnings

Projector



Floor installation

Ceiling fitting



Wall fitting

Protection against impact.
IK 06 - 1,00 joule

Light Flux, Placement



Accessories



Code: 201
Ground spike
H 220 mm



Code: 237
SPD: (Surge Protection Device) 275Vac
Maximum discharge current 10KA (8/20 μ s)
Maximum operating current 5A
Suitable for series connection - IP66