

# 1079252

Product Sheet


**ares**  
THE OUTDOOR BY FLOS

ARES s.r.l - Socio Unico  
v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)  
www.aresill.net - flos.outdoor@flos.com

## Marco

Luminaire for installation on wall - surface mounted. Configuration: die-cast aluminium structure, EN AB-47100 alloy (low copper content) and AISI 304 stainless steel fixing plate. Glass diffuser: transparent with silkscreen border, fixed to the aluminium structure through a robotic gluing system. Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders that are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components that have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP65. In compliance with EN 60598-1 standards. Class of insulation: II. Installation: wiring through two rubber cable glands (5mm-Ø<9mm cables). Outdoor use requires suitable flexible cables assuring the watertightness of the cable gland.

### Marco Power LED / Omnidirectional - Wide Beam 75°

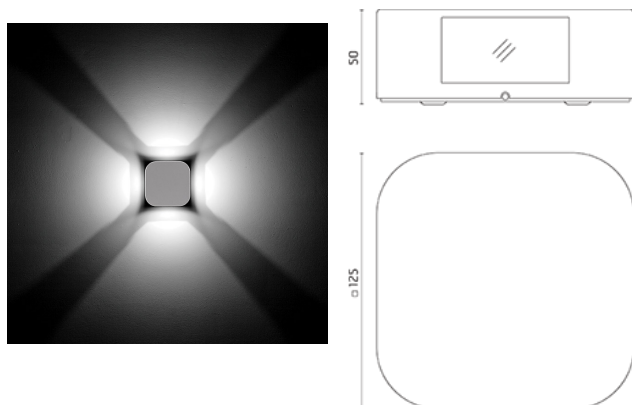

IP65

#### Available Colors for this Version



#### Warnings

##### Wall



Wall fitting



Protection against impact.  
IK 02 - 0,20 joule



The fitting is equipped with 2 cable input.

#### Light Flux, Placement



image not for  
<http://www.aresill.net>



/img/prod\_fluxes/\_5\_wall\_omni\_75°.png

#### Product Code Details

# 1079252

Light Source



WARM WHITE 3000K POWER LEDs 4,4W/100÷240V  
Total power 7W  
LED lm 4x120 ÷ OUTPUT lm 4x97  
CRI>80  
Integral electronic power supply



## Accessories

---



Code: 237

SPD: (Surge Protection Device) 275Vac

Maximum discharge current 10KA (8/20μs)

Maximum operating current 5A

Suitable for series connection - IP66