

# 10517400

Product Sheet

## ares

THE OUTDOOR BY FLOS

ARES s.r.l - Socio Unico

v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)


www.aresill.net - flos.outdoor@flos.com

## Martina


Adjustable spotlight. Configuration: turned and anodized (raw or painted) aluminium structure with stainless steel adjustable bracket. Glass diffuser: transparent or sandblasted with silkscreen border, fixed through a robotic gluing system. Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sand-blasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP67. In compliance with EN60598-1 standards. Class of insulation: III. Installation: the luminaire is equipped with 2000mm cable. Martina 24V and Maxi Martina 24V are equipped with a dc/dc highly efficient resin-coated converter that removes electromagnetic interference and protects against polarity reversal and sudden voltage peak. Parallel wiring required. Mini Martina, Martina RGB and Maxi Martina RGB requires connection in series. We recommend the use of a connection system with a protection degree greater than or equal to the protection degree of the luminaire.

IP67   

### Available Colors for this Version

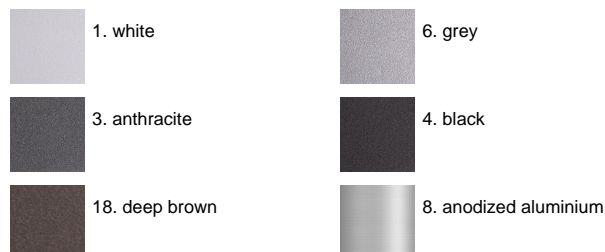


### Martina RGB Power LED / Transparent Glass - Adjustable - Medium Beam 35°



### Warnings

#### Projector

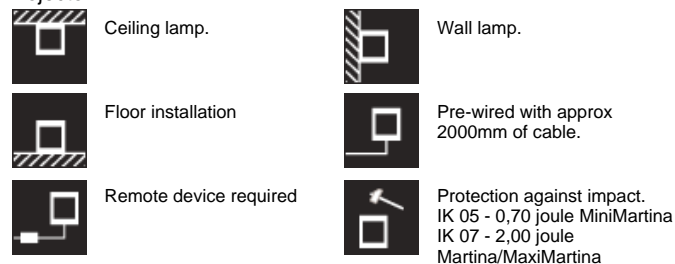

### Light Flux, Placement



### Product Code Details

# 10517400

Light Source



RGB POWER LED 3W/3CHx350mA

Total power 3,4W

Remote electronic power supply to be ordered



## Accessories


---



Code: 136  
Ground spike  
H 200 mm



Code: 142  
DMX Controller  
Dimmer switch for recessed box (60 mm hole centres)



Code: 187  
DMX splitter  
Electronic device to regenerate the DMX signal.  
1 input and 7 output. 12÷24Vdc  
Power supply to be ordered (87 or 175 recommended)



Code: 141  
Supported n. of lamps: 10  
Power supply with DMX interface for RGB fixtures  
36W/220÷240V-3CHx350mA  
(3CHx10x1W) DMX control allowed  
IP67 CLASS I SELV EQ.



Code: 143  
DMX Controller  
Stand-alone/PC interface



Code: 186  
DMX cable  
Shielded twisted pair with 110 Ohm constant impedance