

# 10525512

Product Sheet

**ares**  
THE OUTDOOR BY FLOS


ARES s.r.l - Socio Unico  
v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)  
www.aresill.net - flos.outdoor@flos.com

## Martina


Adjustable spotlight. Configuration: turned and anodized (raw or painted) aluminium structure with stainless steel adjustable bracket. Glass diffuser: transparent or sandblasted with silkscreen border, fixed through a robotic gluing system. Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sand-blasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP67. In compliance with EN60598-1 standards. Class of insulation: III. Installation: the luminaire is equipped with 2000mm cable. Martina 24V and Maxi Martina 24V are equipped with a dc/dc highly efficient resin-coated converter that removes electromagnetic interference and protects against polarity reversal and sudden voltage peak. Parallel wiring required. Mini Martina, Martina RGB and Maxi Martina RGB requires connection in series. We recommend the use of a connection system with a protection degree greater than or equal to the protection degree of the luminaire.

IP67   

### Available Colors for this Version


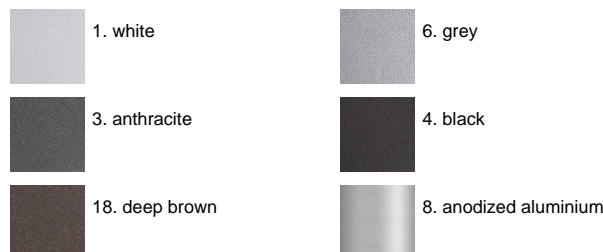


### MaxiMartina Power LED / Transparent Glass - Adjustable - Narrow Beam 10°

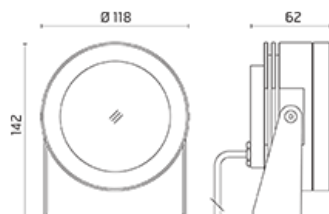

### Warnings

#### Projector



### Light Flux, Placement



### Product Code Details

# 10525512

Light Source



WARM WHITE 3000K POWER LEDs 9,6W/24Vdc  
Total power 11,8W  
LED lm 834 ÷ OUTPUT lm 535  
CRI>80  
Remote electronic power supply to be ordered



## Accessories

---



Code: 136  
Ground spike  
H 200 mm



Code: 215  
3/4 way terminal block 3 poles IP68  
(Ø 5,5÷12 mm cable)



Code: 236  
2 way terminal block 3 poles IP68  
(Ø 5,5÷12 mm cable)



Code: 147  
Supported n. of lamps: 1  
Power supply  
20W/220÷240V - 24Vdc  
IP67 CLASS II SELV.



Code: 155  
Supported n. of lamps: 2  
Power supply  
50W/120÷240V - 24Vdc  
IP67 CLASS II SELV.



Code: 110  
Supported n. of lamps: 5  
Power supply  
70W/220÷240V - 24Vdc  
IP67 CLASS II SELV EQ.