

4827422

Product Sheet

ares

THE OUTDOOR BY FLOS

ARES s.r.l - Socio Unico
v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)
www.aresill.net - flos.outdoor@flos.com

Melrie


Luminaire for installation on wall - surface mounted. Configuration: polycarbonate structure and die-cast aluminium cover and base (MaxiMelrie only), EN AB-47100 alloy (low copper content) Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders that are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components that have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP65 In compliance with EN 60598-1 standards Class of insulation: Melrie: II; MaxiMelrie: I Installation: Melrie: wiring through two rubber cable holders (5mm-Ø<10mm cables); MaxiMelrie: wiring through two rubber cable holders (8mm-Ø<13mm cables). Outdoor use requires suitable flexible cables assuring the watertightness of the cable holder.

IP65   CE

Available Colors for this Version



MaxiMelrie Mid-Power LED / Bidirectional

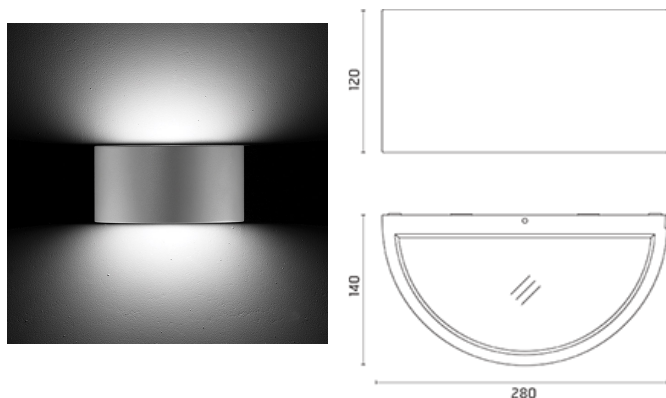

Warnings

Wall



Wall fitting



The fitting is equipped with 2 cable input.



Protection against impact.
IK 09 - 10,00 joule

Light Flux, Placement



Product Code Details

4827422

Light Source



NATURAL WHITE 4000K MID-POWER LEDs 17,6W/220÷240V

Total power 18W

LED lm 2x1291 ÷ OUTPUT lm 2x817

CRI>80

Integral electronic power supply



Accessories



Code: 237

SPD: (Surge Protection Device) 275Vac

Maximum discharge current 10KA (8/20 μ s)

Maximum operating current 5A

Suitable for series connection - IP66