

# 4927800

Product Sheet

## ares

THE OUTDOOR BY FLOS

ARES s.r.l - Socio Unico


v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)

www.aresill.net - flos.outdoor@flos.com

## Memi

Luminaire for installation on wall - surface mounted. Configuration: die-cast aluminium structure, EN AB-47100 alloy (low copper content). Glass diffuser: sandblasted. Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders that are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components that have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP65. In compliance with EN 60598-1 standards. Class of insulation: I. Installation: wiring through M16 plastic cable gland (4,5mm<Ø<10mm cables). Outdoor use requires suitable flexible cables assuring the watertightness of the cable gland.

### Memi Mid-Power LED / Sandblasted Glass

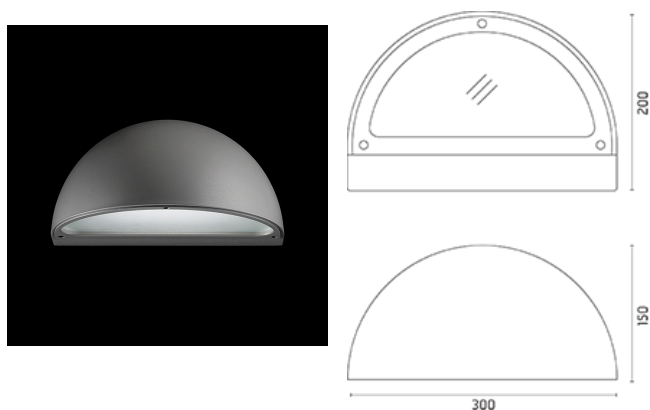

### Product Code Details

# 4927800

Light Source



WARM WHITE 3000K MID-POWER LEDs 15W/220÷240V

Total power 18W

LED lm 2307 ÷ OUTPUT lm 1095

CRI>80

Integral electronic power supply



IP65   

### Available Colors for this Version



### Warnings

#### Wall



Wall fitting



Protection against impact.  
IK 07 - 02,00 joule



The fitting is equipped with 1 cable input

#### Bollard



The fitting is equipped with 1 cable input



Protection against impact.  
IK 07 - 02,00 joule

### Light Flux, Placement



## Accessories

---



Code: 237

SPD: (Surge Protection Device) 275Vac

Maximum discharge current 10KA (8/20μs)

Maximum operating current 5A

Suitable for series connection - IP66