

# 073513

Product Sheet

## ares

THE OUTDOOR BY FLOS

ARES s.r.l - Socio Unico


v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)

www.aresill.net - flos.outdoor@flos.com

## Petra

Round luminaire for installation in-ground - recessed. Configuration: die-cast aluminium structure, EN AB- 47100 alloy (low copper content) and AISI 316L stainless steel frame. Glass diffuser: Tempered transparent or sandblasted glass. Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP67 In compliance with EN 60598-1 standards Class of insulation: I Installation: the luminaire is equipped with a piece of cable with a 2-way connector for 3-conductor cables (H2O STOP) for an easy-to-make connection. Outdoor use requires suitable flexible cables. Installation requires a dedicated box to be ordered separately. It is important to provide a >400mm gravel layer or a drain system (for concrete surfaces) to ensure good drainage and to avoid water stagnation. We recommend the use of a connection system with a protection degree greater than or equal to the protection degree of the luminaire.

### Petra / Symmetric Optic

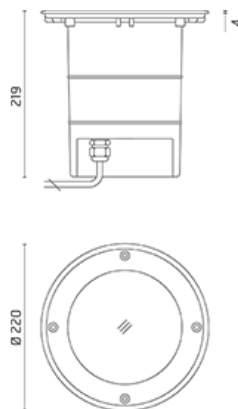

### Product Code Details

# 073513

Light Source



HIT-CE 35W G12

T 105°C



IP67   

### Available Colors for this Version



0. Inox

### Warnings

#### Ground Recessed



Recessed ground fitting



Protection against water ingress from the cable



Protection against impact. IK 09 - 10,00 joule



Pre-wired with approx 250mm of cable.



Static load: 2500Kg walk over (petra)



Do not install in hollow areas



Drive over.



Installation requires a 40 cm water drainage layer (gravel)



Check that difuser's temperature 'T max °C' (tested at 25°C) complies with your local regulation.

### Light Flux, Placement



## Accessories

---



Code: 26  
Box for installation  
Ø 210 H 270 mm



Code: 233  
Sandblasted glass for Petra  
Ø 172 mm



Code: 215  
3/4 way terminal block 3 poles IP68  
(Ø 5,5÷12 mm cable)

