

935979

Product Sheet

ares

THE OUTDOOR BY FLOS


ARES s.r.l - Socio Unico
v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)
www.aresill.net - flos.outdoor@flos.com

Mini Silvia Post


Outdoor luminaire for installation on floor. Configuration: die-cast aluminium structure EN AB-47100 alloy (low copper content), extruded aluminium pole, borosilicate transparent or sandblasted glass, moulded silicone gaskets. Double layer coating for high resistance to corrosion: The aluminium components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sand-blasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection Rating: IP65. In compliance with EN 60598-1 standards. Class of insulation: I. Installation: the luminaire is supplied with a piece of cable and an IP68 connector (for cables 5ϕ<math><13\text{mm}</math>) for direct or end-to-end connection. We recommend installation on a concrete basement or surface, directly with bolts or through the dedicated fixing plate (to be ordered separately).

IP65   

Available Colors for this Version

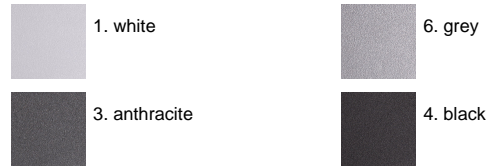

MiniSilvia on post / H. 950 mm - Sandblasted Glass - 360° Emission

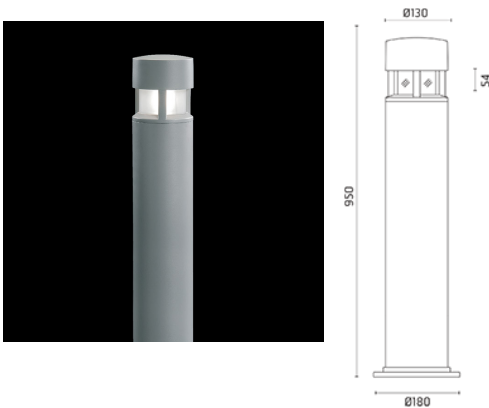

Warnings

Bollard



Bollard light



Protection against impact.
IK 07 - 02,00 joule



The fitting is equipped with 1 cable input

Light Flux, Placement



Product Code Details

935979

Light Source



TC-DEL 18W G24q-2
Electronic ballast

A

Accessories



Code: 21
Base plate and pole fixing bolts
174 x H 200 mm