

**Product Sheet** 




ARES s.r.I - Socio Unico v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy) www.aresill.net - flos.outdoor@flos.com

## Silvia Post


Outdoor luminaire for installation on floor. Configuration: die-cast aluminium structure EN AB-47100 alloy (low copper content), extruded aluminium pole, borosilicate transparent or sandblasted glass, moulded silicone gaskets. Double layer coating for high resistance to corrosion: The aluminium components are painted with a double coat using powders which are complaint with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sand-blasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection Rating: IP65. In compliance with EN 60598-1 standards. Class of insulation: I. Installation: the luminaire is supplied with a piece of cable and an IP68 connector (for cables 5<a href="action-rung">acceptage and acceptage and an IP68 connector (for cables 5<a href="action-rung">acceptage and acceptage and an IP68 connector (for cables 5<a href="action-rung">acceptage acceptage and an IP68 connector (for cables 5<a href="action-rung">acceptage acceptage acceptage and an IP68 connector (for cables 5<a href="action-rung">acceptage acceptage acceptage acceptage and an IP68 connector (for cables 5<a href="action-rung">acceptage acceptage acceptage acceptage acceptage acceptage acceptage acceptage and an IP68 connector (for cables 5<a href="action-rung">acceptage acceptage acceptag

#### Silvia on post / H. 700 mm - Transparent Glass - 120° Emission



# IP65 ♥ ⊕ C€

#### Available Colors for this Version

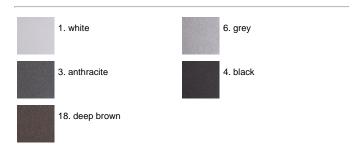

#### Warnings

#### **Bollard**



Bollard light



The fitting is equipped with 1 cable input

Protection against impact. IK 07 - 02,00 joule

### Light Flux, Placement





#### **Product Code Details**

850169

Light Source



QT 32 150W E27





Code: 21 Base plate and pole fixing bolts 174 x H 200 mm