

541011

Product Sheet

ares
THE OUTDOOR BY FLOS


ARES s.r.l - Socio Unico
v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)
www.aresill.net - flos.outdoor@flos.com

Spock


Adjustable projector for installation on ceiling, wall or floor. Configuration: die-cast aluminium structure, EN AB-47100 alloy (low copper content) and AISI 316L stainless steel fixing bracket. Glass diffuser: extra clear with silkscreen border, fixed through a robotic gluing system. The luminaire has three connected parts: wiring unit (silicone gasket), heat sink and emitting unit (silicone glue). A graduated fixing plate allows a precise adjustment of the emitting unit. Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sand-blasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP66. In compliance with EN60598-1 standards. Class of insulation: I. Installation: the luminaire is equipped with 1000mm of cable for an easy-to-make connection. We recommend the use of a connection system with a protection degree greater than or equal to the protection degree of the luminaire.

IP66 

Available Colors for this Version

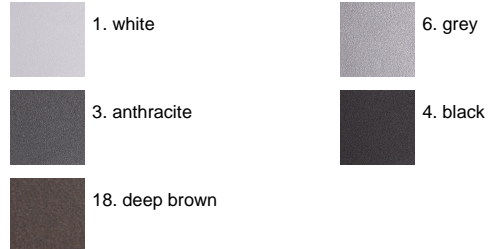


Spock 130 CoB LED - Adjustable - Medium Beam 20°



Warnings

Projector

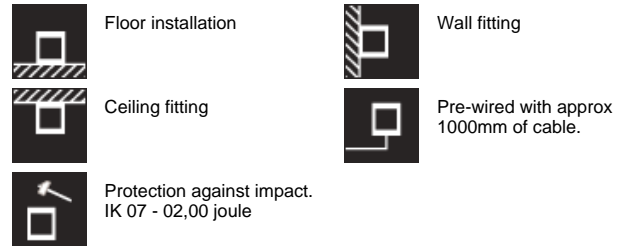

Product Code Details

541011

Light Source



NATURAL WHITE 4000K CoB LED 45W/220÷240V
Total power 52W
LED lm 5963 ÷ OUTPUT lm 4477
CRI >80
Integral electronic power supply



Light Flux, Placement




Accessories



Code: 207
Visor
Ø 130 mm



Code: 210
Flood diffuser
Ø 130 mm



Code: 213
Anti-glare louvre
Ø 130 mm




Code: 203
Kit of 2 ground spikes
H 220 mm



Code: 215
3/4 way terminal block 3 poles IP68
(Ø 5,5÷12 mm cable)



Code: 236
2 way terminal block 3 poles IP68
(Ø 5,5÷12 mm cable)



Code: 237
SPD: (Surge Protection Device) 275Vac
Maximum discharge current 10KA (8/20µs)
Maximum operating current 5A
Suitable for series connection - IP66