

# 1029500

Product Sheet

**ares**  
THE OUTDOOR BY FLOS

ARES s.r.l - Socio Unico  
v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)  
www.aresill.net - flos.outdoor@flos.com

## Trixie


Slim rectangular or round luminaire for installation on wall - surface or recessed.  
Configuration: die-cast aluminium structure, EN AB- 47100 alloy (low copper content).  
Moulded transparent polycarbonate emitting unit (rectangular) or transparent polyurethane resin filling (round) and polished aluminium reflector fixed by double-sided technical tape.  
Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting.  
Protection rating: IP65 In compliance with EN 60598-1 standards Class of insulation: III  
Installation: the luminaire is equipped with a piece of cable for an easy-to-make connection. 24V feeding: power supply installed in a remote position; 230V feeding: power supply located behind the luminaire into the recessed box for installation (to be ordered separately). Outdoor use requires suitable flexible cables. We recommend the use of a connection system with a protection degree greater than or equal to the protection degree of the luminaire.

IP65  

### Available Colors for this Version




### Trixie Low Power LED / Transparent Diffuser

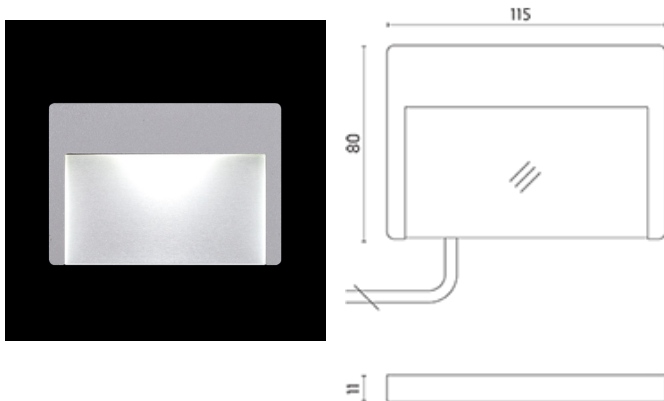

### Warnings

#### Wall Recessed

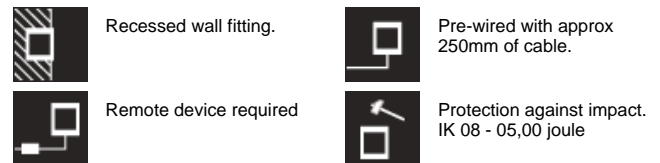

### Light Flux, Placement



### Product Code Details

# 1029500

Light Source



WARM WHITE 3000K LOW POWER LEDs 1,5W/24Vdc

Total power 1,9W

LED lm 149 ÷ OUTPUT lm 61

CRI >80

Remote electronic power supply to be ordered

Dimmable on request, acc.: 144,176





Code: 105  
Box for installation  
106 x 73 H 49 mm



Code: 150  
Supported n. of lamps: 3  
Power supply dual function  
Vout 24Vdc: 8W/100÷240V  
Iout 350mA: 6X1W/100÷240V  
IP20 CLASS II SELV EQ.



Code: 106  
Supported n. of lamps: 3  
Power supply dual function  
Vout 24Vdc: 8W/100÷240V  
Iout 350mA: 6X1W/100÷240V - IP65 CLASS II SELV EQ.



Code: 87  
Supported n. of lamps: 5  
Power supply  
10W/110÷240V - 24Vdc  
IP20 CLASS II SELV.



Code: 175  
Supported n. of lamps: 5  
Power supply  
10W/110÷240V - 24Vdc  
IP67 CLASS II SELV.



Code: 144  
Supported n. of lamps: 8  
Power supply  
17W/110÷240V - 24Vdc  
(15W@110V) IP20 CLASS II SELV.



Code: 176  
Supported n. of lamps: 8  
Power supply  
17W/110÷240V - 24Vdc  
(15W@110V) IP67 CLASS II SELV.



Code: 147  
Supported n. of lamps: 9  
Power supply  
20W/220÷240V - 24Vdc  
IP67 CLASS II SELV.



Code: 155  
Supported n. of lamps: 25  
Power supply  
50W/120÷240V - 24Vdc  
IP67 CLASS II SELV.



Code: 110  
Supported n. of lamps: 30  
Power supply  
70W/220÷240V - 24Vdc  
IP67 CLASS II SELV EQ.



Code: 156  
Supported n. of lamps: 45  
Power supply  
100W/120÷240V - 24Vdc  
IP67 CLASS II SELV.