

10813398

Product Sheet

ares

THE OUTDOOR BY FLOS

ARES s.r.l - Socio Unico


v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)

www.aresill.net - flos.outdoor@flos.com

Vincenza

Bollard light. Configuration: die-cast aluminium structure, EN AB-47100 alloy (low copper content). Extruded aluminium stem. Plastic diffuser: sandblasted Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP65 (with base) or IP67 (in-ground). In compliance with EN 60598-1 standards Class of insulation: mains: I; low voltage: III Installation: version with base: wiring through one M16 cable gland. Direct fixation with bolts to a concrete surface or through a dedicated fixing plate (to be ordered separately) in a concrete basement; version in-ground: wiring through two M16 cable glands. For a better stability, we recommend to concrete the root of the pole. Outdoor use requires suitable flexible cables assuring the watertightness of the cable gland.

Vincenza Power LED / H. 370 mm - In Ground - 180° Asymmetric Emission

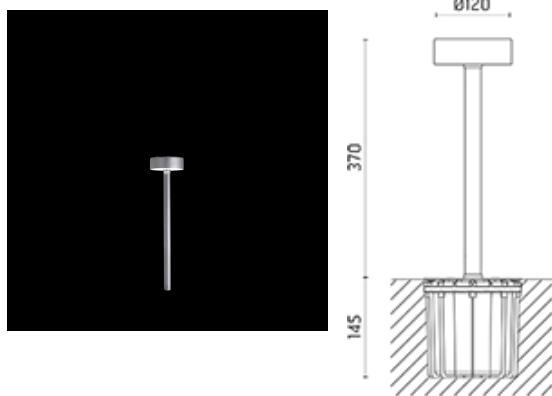

Product Code Details

10813398

Light Source



WARM WHITE 3000K POWER LEDs 6,4W/24Vdc

Total power 7,9W

LED lm 720 ÷ OUTPUT lm 351

CRI >80

Remote electronic power supply to be ordered



IP67   

Available Colors for this Version



Warnings

Bollard



Bollard Light_in-ground base. Installation requires a 30 cm water drainage layer (gravel)



Do not install in hollow areas



Remote device required for low voltage version



Recessed ground base.



The fitting is equipped with 2 cable input for in-ground version.



Protection against impact. IK 10 - 20,00 joule

Light Flux, Placement



Accessories



Code: 175
Supported n. of lamps: 1
Power supply
10W/110÷240V - 24Vdc
IP67 CLASS II SELV.



Code: 155
Supported n. of lamps: 4
Power supply
50W/120÷240V - 24Vdc
IP67 CLASS II SELV.



Code: 110
Supported n. of lamps: 7
Power supply
70W/220÷240V - 24Vdc
IP67 CLASS II SELV EQ.