

10419700

Product Sheet

ares


THE OUTDOOR BY FLOS

ARES s.r.l - Socio Unico
v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)
www.aresill.net - flos.outdoor@flos.com

Viviana

Bollard light. Configuration: hot-dip zinc-coated IPE steel bar (H-frame with base) for high resistance to corrosion. The emission unit, fixed to the upper part of the bar, is composed of a plastic container with zinc-coated cover. Feeding cables are hosted in a hot-dip zinc-coated cover placed on the back side of the bar. Protection Rating: IP65 In compliance with EN 60598-1 standards Class of insulation: I Installation: wiring through two rubber cable glands (8ϕ<math><13\text{mm}</math> cables). We recommend installation on a concrete basement or surface, directly with bolts or through the dedicated fixing plate (to be ordered separately).

Viviana Power LED

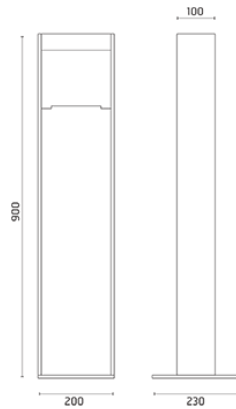

IP65

Available Colors for this Version



7. zinc

Warnings

Bollard



Bollard light



The fitting is equipped with 2 cable input.



Protection against impact.
IK 10 - 20,00 joule

Light Flux, Placement



Product Code Details

10419700

Light Source




NATURAL WHITE 4000K POWER LEDs 8W/220÷240V
Total power 11W
LED lm 975 ÷ OUTPUT lm 261
CRI >80
Integral electronic power supply



Accessories



Code: 109
Base plated and fixing bolts
200 x 230 x H 210 mm



Code: 237
SPD: (Surge Protection Device) 275Vac
Maximum discharge current 10KA (8/20 μ s)
Maximum operating current 5A
Suitable for series connection - IP66