

# 532005

Product Sheet


**ares**  
THE OUTDOOR BY FLOS

ARES s.r.l - Socio Unico  
v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)  
www.aresill.net - flos.outdoor@flos.com

## Zefiro

Cylindrical bollard light. Configuration: die-cast aluminium cap, EN AB-47100 alloy (low copper content) and extruded aluminium pole. Polycarbonate diffuser: Transparent and UV-stabilised. Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP65 In compliance with EN 60598-1 standards Class of insulation: II Installation: the luminaire is equipped with a piece of cable with a 2-way connector for 3-conductor cables for an easy to make connection. We recommend installation on a concrete basement or surface, directly with bolts or through a dedicated fixing plate (to be ordered separately). Outdoor use requires suitable flexible cables. We recommend the use of a connection system with a protection degree greater than or equal to the protection degree of the luminaire.

### Zefiro Mid-Power LED / H.600mm

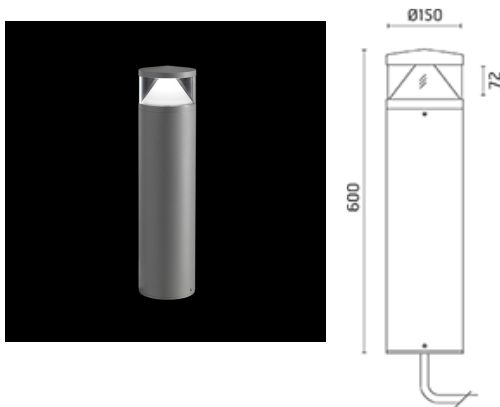

IP65   

### Available Colors for this Version



### Warnings

#### Bollard



Bollard light



Pre-wired with approx 100mm of cable.



Protection against impact.  
IK 07 - 02,00 joule

### Light Flux, Placement



### Product Code Details

# 532005

Light Source



NATURAL WHITE 4000K MID-POWER LEDs 14W/220÷240V  
Total power 17W  
LED lm 1937 ÷ OUTPUT lm 1494  
CRI >80  
Integral electronic power supply



## Accessories

---



Code: 21  
Base plate and pole fixing bolts  
174 x H 200 mm



Code: 185  
High resistance in-ground fixing base



Code: 237  
SPD: (Surge Protection Device) 275Vac  
Maximum discharge current 10KA (8/20µs)  
Maximum operating current 5A  
Suitable for series connection - IP66



Code: 215  
3/4 way terminal block 3 poles IP68  
(Ø 5,5÷12 mm cable)

