


Last information update: June 2018



**Large body luminaire with always-on operation and emergency operation (SA) 1h 24 W TC-L**

**Product code**

5436

**Technical description**

The body of the fitting, reflector, frame and opal diffuser screen are made of self-extinguishing shatter-proof polycarbonate. This fitting is designed for emergency lighting with TC-L fluorescent lamp 24W. The screen is fixed to the body by four captive screws that allow for protection degree IP66. The base comes complete with double PG11 for through wiring. The base is intended for application either on three-body recessed universal connector block (type 503) or water-tight external cable trays with rigid pipes (ø 16/20-mm) by a special junction (accessory). The SA version is always on, even in the event of power failure. Emergency operation 1 hour. Battery recharge time 12 hours. NiCd 4.8V 2.2Ah batteries are used. The fitting is equipped with an autotest device with operation LED. The fitting permits deactivating the emergency operation for short periods (Rest Mode); when power supply is started again, the emergency system resumes its functions too. The fitting permits deactivating the emergency operation for long inactivity periods (Inhibition Mode); it needs manual restarting. The operation LED shows if the fitting is functioning properly or there is a fault. LED on - steady light: correct operation (during the test the LED is on). Quickly flashing LED: lamp fault. Slowly flashing LED: insufficient battery autonomy. LED off: faulty battery (LED off in emergency).

**Installation**

Wall-mounted.

**Dimension (mm)**

436x185x75

**Colour**

White (01)

**Weight (Kg)**

1.79

**Mounting**

wall surface

**Wiring**

Electronic control gear inside the fitting.

**Notes**

Available accessories: junction for external cable trays and replacement battery. Emergency light flow 186 lumens.

Complies with EN60598-1 and pertinent regulations



**Product configuration: 5436+1774**

1774: Compact fluorescent lamp 24W 2G11 4000 K (Philips)

**Product characteristics**

Total lighting output [Lm]: 821

Total power [W]: 27

Luminous efficacy [Lm/W]: 30.4

Ambient temperature range: from -20°C to +35°C.

Total luminous flux at or above an angle of 90° [Lm]: 0

Emergency luminous flux [Lm]: 217

Voltage [V]: 230

Number of optical assemblies: 1

**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 46

Lamp code: 1774

ZVEI Code: TC-L

Nominal power [W]: 24

Nominal luminous [Lm]: 1800

Lamp maximum intensity [cd]: /

Beam angle [°]: /

Number of lamps for optical assembly: 1

Socket: 2G11

Ballast losses [W]: 3


Colour temperature [K]: 4000

CRI: 85

Wavelength [Nm]: /

MacAdam Step: /

**Polar**

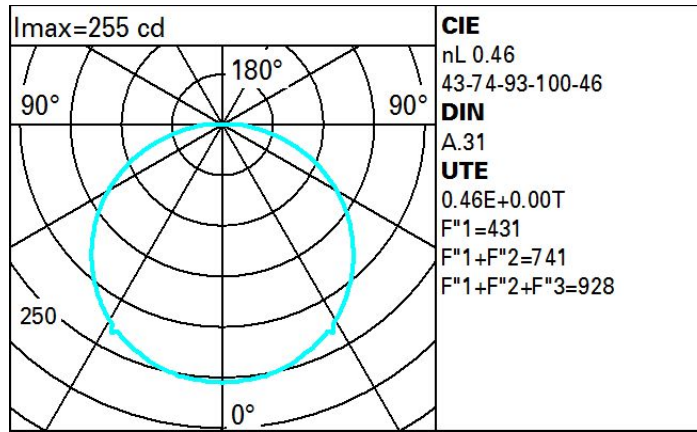

**Utilisation factors**

R	77	75	73	71	55	53	33	00	DRR
K0.8	29	24	20	18	23	20	20	16	36
1.0	32	27	24	21	26	23	23	20	43
1.5	37	33	30	27	32	29	29	25	56
2.0	40	36	34	31	35	33	32	29	64
2.5	41	39	36	34	38	35	35	32	70
3.0	43	40	38	36	39	37	37	34	75
4.0	44	42	40	39	41	40	39	37	80
5.0	45	43	42	41	42	41	40	38	83

**Luminance curve limit**

