


Last information update: May 2018

**Ceiling-mounting 3 LED neutral white - spot optic****Product code**

BA79

**Technical description**

Lighting system with down-light emission designed to use monochromatic Neutral White (4200K) LEDs with fixed spot optic. Optical assembly, ceiling base and frame made of diecast aluminium alloy, with acrylic liquid paint treatment with high resistance to atmospheric agents and UV rays; tempered transparent sodium calcium closing glass, 4 mm thick, siliconed to frame. Provided with fast-coupling closing system between frame, optical assembly and ceiling base, without the use of tools. Internal silicone watertight gaskets. Complete with 3 Neutral White (4200K) monochromatic LEDs, Spot (S) optics with plastic lens, black polycarbonate multi-groove ring for visual comfort and built-in electronic ballast. Single cable entrance via black polyamide PG11 cable clamp, suitable for  $\varnothing$  6.5÷11mm cables. Connection with three fast-coupling terminals. Possibility to use unipolar cables with 2.4÷3.4mm diameter. Various accessories available: refractor for elliptical distribution, diffusing prismatic glass and chromatic filters. All external screws are made of stainless steel A2.

**Installation**

Ceiling installation with down-light luminous emission.

**Dimension (mm)**

$\varnothing$ 78x123

**Colour**

Grey (15)

**Weight (Kg)**

0.64

**Mounting**

ceiling surface


**Wiring**

Control gear with 220÷240Vac 50/60Hz electronic ballast.

**Notes**

Version in insulation class II with outgoing cable on demand. Spare parts for LED circuit and electronic control gear available for extraordinary maintenance.

Complies with EN60598-1 and pertinent regulations

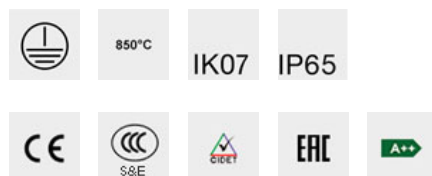**Product configuration: BA79****Product characteristics**

Total lighting output [Lm]: 265.4  
Total power [W]: 5.7  
Luminous efficacy [Lm/W]: 46.6  
Life Time: 50,000h - L70 - B20 (Ta 25°C)  
Number of optical assemblies: 1

Total luminous flux at or above an angle of 90° [Lm]: 0  
Emergency luminous flux [Lm]: /  
Voltage [V]: -  
Ambient temperature range: from -20°C to +35°C.

**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 82  
Lamp code: LED  
ZVEI Code: LED  
Nominal power [W]: 4.5  
Nominal luminous [Lm]: 323  
Lamp maximum intensity [cd]: /  
Beam angle [°]: 6°

Number of lamps for optical assembly: 1  
Socket: /  
Ballast losses [W]: 1.2  
Colour temperature [K]: 4200  
CRI: 75  
Wavelength [Nm]: /  
MacAdam Step: 4

**Polar**

