


Last information update: May 2018

**Up/down light wall-mounting LED neutral white -flood/flood optic****Product code**

BC22

Technical description

Lighting system with up-down emission designed to use monochromatic Neutral White (4200K) LEDs with medium adjustable optic ($\pm 15^\circ$ around vertical axis and 180° around horizontal plane). Optical assembly, ceiling base, arm and frame made of diecast aluminium alloy, with acrylic liquid paint treatment with high resistance to atmospheric agents and UV rays; double tempered transparent sodium calcium closing glass, 4 mm thick, siliconed to frame. Provided with fast-coupling closing system between frame, optical assembly and wall base, without the use of tools. Internal silicone watertight gaskets. Complete with circuit with 6+6 monochromatic Neutral White (4200K) power LEDs, Medium (M) optics with plastic lens, and built-in electronic ballast. Double black polyamide PG11 cable clamp for through wiring (suitable for cables with 6.5-11mm diameter). Three-pole terminal board designed for through earth wire. Connection between terminal board and control gear via cables with fast-coupling connectors. Various accessories available: refractor for elliptical distribution, diffusing prismatic glass and chromatic filters. All external screws are made of stainless steel A2.

Installation

Wall installation with down-light luminous emission.

Dimension (mm)

$\varnothing 109 \times 216$

Colour

Grey (15)

Weight (Kg)

2.35

Mounting

wall arm/wall surface


Wiring

Control gear with 220-240Vac 50/60Hz electronic ballast.

Notes

Insulation class II, available with Insulation Class I (on demand). Spare parts for LED circuit and electronic control gear available for extraordinary maintenance. Anti-theft fastening system with torx screws between wall arm and optical assembly on demand.

Complies with EN60598-1 and pertinent regulations

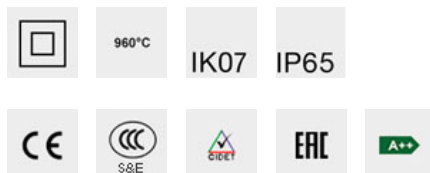**Product configuration: BC22****Product characteristics**

Total lighting output [Lm]: 452.7
 Total power [W]: 13.9
 Luminous efficacy [Lm/W]: 32.6
 Life Time: 50,000h - L70 - B20 (Ta 25°C)
 Number of optical assemblies: 2


Total luminous flux at or above an angle of 90° [Lm]: 0
 Emergency luminous flux [Lm]: /
 Voltage [V]: -
 Ambient temperature range: from -20°C to $+35^\circ\text{C}$.

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 58
 Lamp code: LED
 ZVEI Code: LED
 Nominal power [W]: 4.9
 Nominal luminous [Lm]: 389
 Lamp maximum intensity [cd]: /
 Beam angle [$^\circ$]: 14°

Number of lamps for optical assembly: 1
 Socket: /
 Ballast losses [W]: 2
 Colour temperature [K]: 4200
 CRI: 75
 Wavelength [Nm]: /
 MacAdam Step: 4

Polar

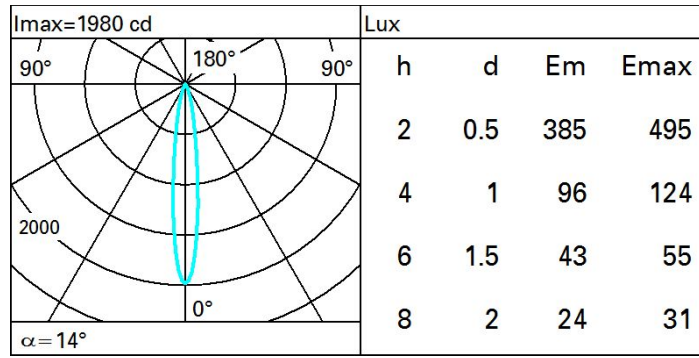

Isolux

