


Last information update: May 2018

**Wall-/Ceiling-mounted - 18 Neutral White LEDs - 100-277V ac - L=1585mm - Wall Washer Optic****Product code**

BH00

**Technical description**

Direct light luminaire, designed to use monochrome LED lamps. Ceiling- and wall-mounted. Consists of a body and supports for installation, to be ordered separately. Extruded aluminium body, with die-cast aluminium end caps complete with silicone seals. Coated with liquid acrylic paint with a high level of weather and UV ray resistance. Lateral power supply box made of PPS (polyphenylene sulfide). The top of the optical assembly is closed by a 3 mm thick transparent glass screen, fixed with silicone. Complete with multi-LED plate in Neutral White 4200K. Fitted with a PMMA diffusing filter and optic with plastic (methacrylate) lens for Wall Washer lighting. The lateral box is supplied with a double connector, male/female, with 3-pin quick coupling for pass-through wiring and a closing cap on one side. All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN 60598-1 standards and particular requirements.

**Installation**

Accessories available for installation:  $\pm 90^\circ$  adjustable arms L=138mm (code 5576), arms extendable from 309 to 389mm and adjustable  $\pm 90^\circ$  (code 5577), bracket for wall-mounting L=350mm (code BZ10), brackets for mounting on balustrades L297mm (code 5578), bracket for surface- or ceiling-mounting L=350mm (code 5570)

**Dimension (mm)**

1585x75x66

**Colour**

Grey (15)

**Weight (Kg)**

4.49

**Mounting**

wall surface|ceiling surface

**Wiring**

The product is supplied with electronic control gear, 220÷240Vac, 50/60Hz contained in the luminaire. Available for electrical connection: IP66 3-pin female connector (BZ12), IP66 3-pin male connector + closing cap (BZ13), IP66 3-pin male connector + female connector (BZ14), multi-pole cable units with 3-pin male + female connectors (BZJ0-BZJ1-BZJ2)

**Notes**

Product complete with LED lamp.

Complies with EN60598-1 and pertinent regulations

**Product configuration: BH00****Product characteristics**

Total lighting output [Lm]: 1228  
 Total power [W]: 23.8  
 Luminous efficacy [Lm/W]: 51.6  
 Life Time: 100,000h - L80 - B10 (Ta 25°C)  
 Ambient temperature range: from -20°C to +35°C.


Total luminous flux at or above an angle of 90° [Lm]: 0  
 Emergency luminous flux [Lm]: /  
 Voltage [V]: -  
 Life Time: 100,000h - L80 - B10 (Ta 40°C)  
 Number of optical assemblies: 1

**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 64  
 Lamp code: LED  
 ZVEI Code: LED  
 Nominal power [W]: 20  
 Nominal luminous [Lm]: 1910  
 Lamp maximum intensity [cd]: /  
 Beam angle [°]: /

Number of lamps for optical assembly: 1  
 Socket: /  
 Ballast losses [W]: 3.8  
 Colour temperature [K]: 4000  
 CRI: 80  
 Wavelength [Nm]: /  
 MacAdam Step: 3

Polar

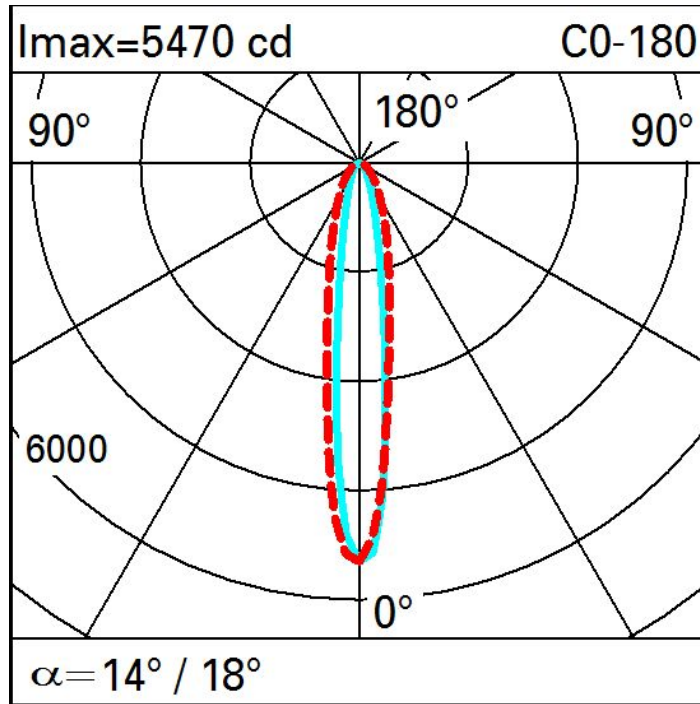

Illuminances

Lux		Wall distance = 1m											
3													
		0.1	0.3	1	6	22	60	21	6	2	0.5	0.2	
2		0.8	2	5	13	35	90	34	13	5	2	0.9	
		1	3	6	15	33	78	35	14	6	3	2	
1		2	3	6	13	29	65	31	14	6	3	2	
		2	3	6	12	25	51	26	12	6	3	2	
0													
	m	-2	-1	0	1	2	3						