


Last information update: May 2018

**Floodlight for immersion - Floodlight 6 LEDs - 350mA DC****Product code**

BH87

Technical description

Monochrome floodlight for permanent immersion, IP68 5m. Adjustable about the vertical axis and relative to the horizontal plane. The luminaire is made strictly of AISI 316L stainless steel to guarantee maximum lasting reliability in pools and fountains (fresh water). Clear, transparent 6mm thick tempered closing glass. All screws used are made of stainless steel and the seals are silicone. The product is supplied with a 4m long 2x0,5NS20N power cable. The luminaire technical characteristics conform to EN60598-2-18 standards and particular requirements. IP68 -IK08. The luminaire is complete with 6 Neutral White LEDs (6x1,2W). Optical assembly opening is not required for its installation. Insulation class III. The luminaire must be powered by a 700mA DC external driver.

Dimension (mm)

136x109x25

Colour

Steel (13)

Mounting

wall recessed|ground recessed

Notes

Permanent immersion

Complies with EN60598-1 and pertinent regulations



IK08

IP68

**Product configuration: BH87****Product characteristics**

Total lighting output [Lm]: 516

Total power [W]: 6.2

Luminous efficacy [Lm/W]: 83.2

Life Time: 100,000h - L80 - B10 (Ta 25°C)

Number of optical assemblies: 1

Total luminous flux at or above an angle of 90° [Lm]: 0

Emergency luminous flux [Lm]: /

Voltage [V]: -

Ambient temperature range: from -20°C to +35°C.

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 77

Lamp code: LED

ZVEI Code: LED

Nominal power [W]: 6.2

Nominal luminous [Lm]: 670

Lamp maximum intensity [cd]: /

Beam angle [°]: 30°

Number of lamps for optical assembly: 1

Socket: /

Ballast losses [W]: 0

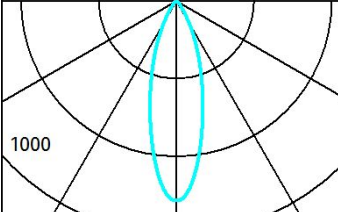


Colour temperature [K]: 4000

CRI: 75

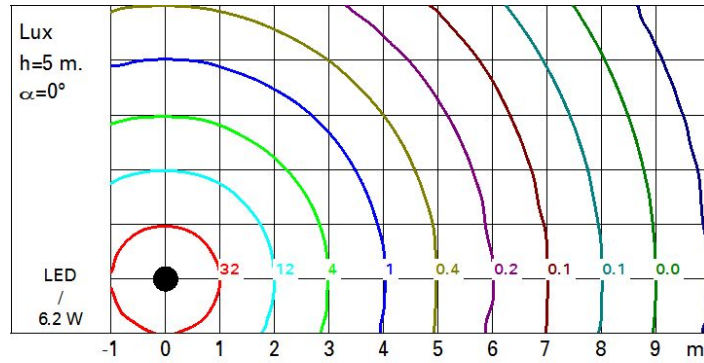
Wavelength [Nm]: /

MacAdam Step: /

Polar

Imax=1283 cd		Lux				
90°	180°	90°	h	d	Em	Emax
			1	0.5	982	1283
			2	1.1	246	321
			3	1.6	109	143
			4	2.1	61	80
$\alpha=30^\circ$						

Isolux



UGR diagram

Corrected UGR values (at 670 lm bare lamp luminous flux)												
Reflect.:		viewed crosswise					viewed endwise					
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
Room dim		viewed crosswise					viewed endwise					
x	y											
2H	2H	13.5	14.2	13.8	14.4	14.7	13.5	14.2	13.8	14.4	14.7	
	3H	13.8	14.4	14.1	14.6	14.9	13.6	14.2	13.9	14.5	14.7	
	4H	13.8	14.4	14.2	14.7	15.0	13.6	14.1	13.9	14.4	14.7	
	6H	13.8	14.3	14.2	14.7	15.0	13.5	14.1	13.9	14.4	14.7	
	8H	13.8	14.3	14.2	14.6	15.0	13.5	14.0	13.9	14.3	14.7	
	12H	13.8	14.3	14.2	14.6	14.9	13.5	13.9	13.8	14.3	14.6	
4H	2H	13.6	14.1	13.9	14.4	14.7	13.8	14.4	14.2	14.7	15.0	
	3H	13.9	14.4	14.3	14.7	15.1	14.0	14.4	14.3	14.8	15.1	
	4H	14.0	14.4	14.4	14.8	15.2	14.0	14.4	14.4	14.8	15.2	
	6H	14.0	14.4	14.5	14.8	15.2	14.0	14.4	14.4	14.8	15.2	
	8H	14.0	14.4	14.5	14.8	15.2	14.0	14.3	14.4	14.7	15.2	
	12H	14.0	14.3	14.4	14.7	15.2	13.9	14.2	14.4	14.7	15.1	
8H	4H	14.0	14.3	14.4	14.7	15.2	14.0	14.4	14.5	14.8	15.2	
	6H	14.0	14.3	14.5	14.8	15.2	14.0	14.3	14.5	14.8	15.2	
	8H	14.0	14.3	14.5	14.7	15.2	14.0	14.3	14.5	14.7	15.2	
	12H	14.0	14.2	14.5	14.7	15.2	14.0	14.2	14.5	14.7	15.2	
12H	4H	13.9	14.2	14.4	14.7	15.1	14.0	14.3	14.4	14.7	15.2	
	6H	14.0	14.2	14.5	14.7	15.2	14.0	14.3	14.5	14.7	15.2	
	8H	14.0	14.2	14.5	14.7	15.2	14.0	14.2	14.5	14.7	15.2	
Variations with the observer position at spacing:												
S =		1.0H	2.3 / -2.0				2.3 / -2.0					
		1.5H	4.4 / -3.1				4.4 / -3.1					
		2.0H	6.2 / -3.7				6.2 / -3.7					