


Last information update: May 2018

**Compact - Wall-/Ceiling-mounted - RGB LEDs - DMX512-RDM control - L=998mm - Wall Washer Optic****Product code**

BI73

**Technical description**

Direct light luminaire, designed to use RGB LED lamps (Red, Green, Blue) and DMX512-RDM control with searching and addressing function. Ceiling- and wall-mounted. Consists of a body and supports for installation, to be ordered separately. Extruded aluminium body, with die-cast aluminium end caps complete with silicone seals. Coated with liquid acrylic paint with a high level of weather and UV ray resistance. Lateral control gear box made of PPS (polyphenylene sulfide). The top of the optical assembly is closed by a 3 mm thick transparent glass screen, fixed with silicone. Complete with multi-LED plate with individual LEDs in Red, Green and Blue (RGB). Fitted with optics with plastic (methacrylate) lens for Wall Washer lighting. The lateral box is supplied with a double connector, male/female, with 5-pin quick coupling for pass-through wiring and a closing cap on one side. All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN 60598-1 standards and particular requirements.

**Installation**

Accessories available for installation:  $\pm 90^\circ$  adjustable arms L=138mm (code 5576), arms extendable from 309 to 389mm and adjustable  $\pm 90^\circ$  (code 5577), bracket for wall-mounting L=310mm (code BZ10), brackets for mounting on balustrades L297mm (code 5578), bracket for surface- or ceiling-mounting L=309mm (code 5570).

**Dimension (mm)**

998x75x66

**Colour**

Grey (15)

**Weight (Kg)**

3

**Mounting**

wall surface|ceiling surface

**Wiring**

The product is supplied with electronic control gear, with DMX512-RDM control 220÷240Vac, 50/60Hz contained in the luminaire. Available for electrical connection and DMX-RDM control: IP66 5-pin female connector (BZ15), IP66 5-pin male connector + closing cap (BZ16), IP66 5-pin male connector + female connector (BZ17), multi-pole cable units with 5-pin male + female connectors (BZT4-BZT5-BZT6). DMX specifications require the insertion of a 120 Ohm terminating resistor to be placed between the DATA+ and DATA- cables of the last product in the line (code BZQ7)

**Notes**

Product complete with LED lamp. DMX specifications require the insertion of a 120 Ohm terminating resistor to be placed between the DATA+ and DATA- cables of the last product in the line (code BZQ7)

Complies with EN60598-1 and pertinent regulations

**Product configuration: BI73****Product characteristics**

Total lighting output [Lm]: 981  
 Total power [W]: 32.4  
 Luminous efficacy [Lm/W]: 30.3  
 Life Time: 50,000h - L80 - B10 (Ta 25°C)  
 Ambient temperature range: from -20°C to +35°C.


Total luminous flux at or above an angle of 90° [Lm]: 0  
 Emergency luminous flux [Lm]: /  
 Voltage [V]: -  
 Life Time: 50,000h - L80 - B20 (Ta 40°C)  
 Number of optical assemblies: 1

**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 64  
 Lamp code: LED  
 ZVEI Code: LED  
 Nominal power [W]: 27  
 Nominal luminous [Lm]: 1530  
 Lamp maximum intensity [cd]: /  
 Beam angle [°]: /

Number of lamps for optical assembly: 1  
 Socket: /  
 Ballast losses [W]: 5.4  
 Colour temperature [K]: /  
 CRI: /  
 Wavelength [Nm]: /  
 MacAdam Step: /

Polar

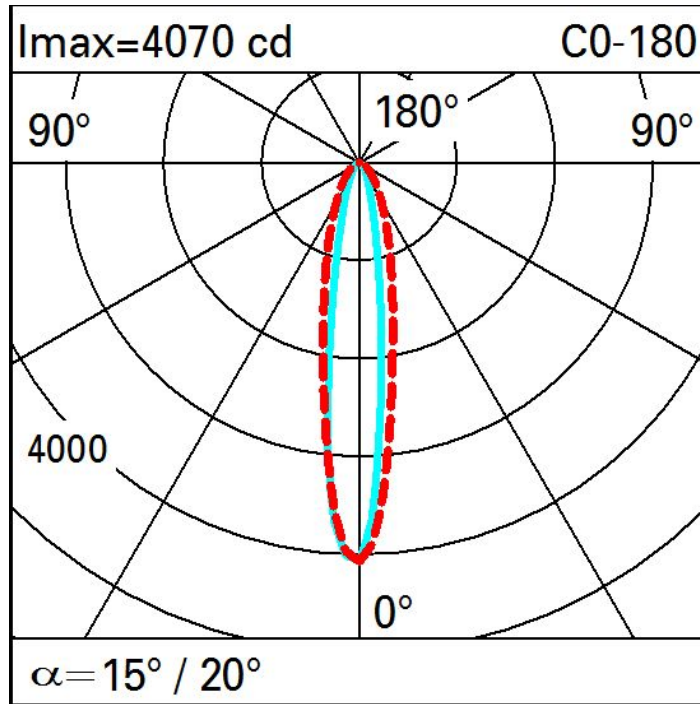

Illuminances

Lux		Wall distance = 1m										
3												
		0.2	0.6	2	6	17	41	15	4	1	0.3	0.1
2		0.8	2	4	11	28	65	22	8	3	1	0.6
		1	2	5	12	29	59	23	9	4	2	0.9
1		1	3	5	12	27	51	21	9	4	2	1
		1	3	6	11	23	41	18	8	4	2	1
0												
	m	-2	-1	0	1	2	3					