


Last information update: May 2018

**Compact - Wall-/Ceiling-mounted - RGB LEDs - DMX512-RDM control - L=1490mm - Wall Washer Optic****Product code**

BI74

Technical description

Direct light luminaire, designed to use RGB LED lamps (Red, Green, Blue) and DMX512-RDM control with searching and addressing function. Ceiling- and wall-mounted. Consists of a body and supports for installation, to be ordered separately. Extruded aluminium body, with die-cast aluminium end caps complete with silicone seals. Coated with liquid acrylic paint with a high level of weather and UV ray resistance. Lateral control gear box made of PPS (polyphenylene sulfide). The top of the optical assembly is closed by a 3 mm thick transparent glass screen, fixed with silicone. Complete with multi-LED plate with individual LEDs in Red, Green and Blue (RGB). Fitted with optics with plastic (methacrylate) lens for Wall Washer lighting. The lateral box is supplied with a double connector, male/female, with 5-pin quick coupling for pass-through wiring and a closing cap on one side. All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN 60598-1 standards and particular requirements.

Installation

Accessories available for installation: $\pm 90^\circ$ adjustable arms L=138mm (code 5576), arms extendable from 309 to 389mm and adjustable $\pm 90^\circ$ (code 5577), bracket for wall-mounting L=670mm (code BZ11), brackets for mounting on balustrades L297mm (code 5578), bracket for surface- or ceiling-mounting L=644mm (code 5571).

Dimension (mm)

1490x75x66

Colour

Grey (15)

Weight (Kg)

4.29

Mounting

wall surface|ceiling surface

Wiring

The product is supplied with electronic control gear, with DMX512-RDM control 220÷240Vac, 50/60Hz contained in the luminaire. Available for electrical connection and DMX-RDM control: IP66 5-pin female connector (BZ15), IP66 5-pin male connector + closing cap (BZ16), IP66 5-pin male connector + female connector (BZ17), multi-pole cable units with 5-pin male + female connectors (BZT4-BZT5-BZT6). DMX specifications require the insertion of a 120 Ohm terminating resistor to be placed between the DATA+ and DATA- cables of the last product in the line (code BZQ7)

Notes

Product complete with LED lamp. DMX specifications require the insertion of a 120 Ohm terminating resistor to be placed between the DATA+ and DATA- cables of the last product in the line (code BZQ7)

Complies with EN60598-1 and pertinent regulations

**Product configuration: BI74****Product characteristics**

Total lighting output [Lm]: 1475
 Total power [W]: 45.1
 Luminous efficacy [Lm/W]: 32.7
 Life Time: 50,000h - L80 - B10 (Ta 25°C)
 Ambient temperature range: from -20°C to +35°C.


Total luminous flux at or above an angle of 90° [Lm]: 0
 Emergency luminous flux [Lm]: /
 Voltage [V]: -
 Life Time: 50,000h - L80 - B20 (Ta 40°C)
 Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 64
 Lamp code: LED
 ZVEI Code: LED
 Nominal power [W]: 40
 Nominal luminous [Lm]: 2300
 Lamp maximum intensity [cd]: /
 Beam angle [°]: /

Number of lamps for optical assembly: 1
 Socket: /
 Ballast losses [W]: 5.1
 Colour temperature [K]: /
 CRI: /
 Wavelength [Nm]: /
 MacAdam Step: /

Polar

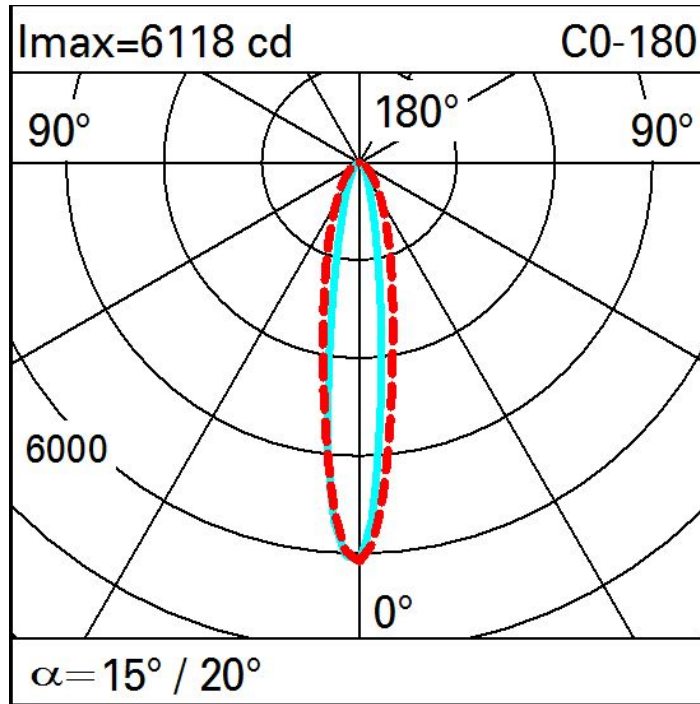

Illuminances

Lux		Wall distance = 1m												
3														
		0.3	0.9	3	9	26	62	22	6	2	0.5	0.2		
2	1	3	7	17	43	93	34	12	5	2	0.9			
		2	4	8	19	43	90	35	13	6	3	1		
1	2	4	8	18	40	78	32	14	6	3	2			
		2	4	8	17	35	62	27	12	6	3	2		
0	m	-2	-1	0	1	2	3							