


Last information update: June 2018

**Mini - Wall-/Ceiling-mounted - Neutral White LED - 24V dc - L=1056mm - 30° Flood Optic****Product code**

BK84

**Technical description**

Direct light luminaire, designed to use monochrome LED lamps. Ceiling- and wall-mounted. Consists of a body and supports for installation (to be ordered separately). Extruded aluminium body, with zamak die-cast end caps complete with silicone gaskets. Coated with liquid acrylic paint with a high level of weather and UV ray resistance. The top of the optical assembly is closed by a 3 mm thick transparent glass screen, fixed with silicone. Complete with multi-LED power plate in Neutral White with 24V dc electronic circuit (ballast to be ordered separately); 24V smart driver allowing constant light flow emission despite variations in the input voltage (from 30V dc to 16V dc). Fitted with satin-finish polycarbonate film and optics with plastic (methacrylate) lens for 30° FLOOD lighting. All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN 60598-1 standards and particular requirements.

**Installation**

The following accessories are available for installation: adjustable wall-mounted arms in AISI304 stainless steel (L=85mm code BZJ8, 200mm code BZJ9) and a plate for surface- or ceiling-mounting made of anodised aluminium (BZJ6).

**Dimension (mm)**

1056x37x38

**Colour**

Grey (15)

**Weight (Kg)**

1.6

**Mounting**

wall surface|ceiling surface

**Wiring**

The product is supplied with a single nickel-plated brass cable gland PG9 and a 2x1mm<sup>2</sup> PVC and polyurethane outlet cable, 2000mm long. For the electrical connection there is an IP68 linear connector (BZK6) and an IP67 junction box with quick-coupling terminals (BZK1). 24V dc electronic ballasts to be ordered separately: 10W (9908), 24W (9909), 72W (9910), 96W (9911), 120W (BZK0), 240W (9912) and 480W (BZK1)

**Notes**

Product complete with LED lamp

Complies with EN60598-1 and pertinent regulations

**Product configuration: BK84****Product characteristics**

Total lighting output [Lm]: 743  
 Total power [W]: 14  
 Luminous efficacy [Lm/W]: 53.1  
 Life Time: 100,000h - L80 - B10 (Ta 25°C)  
 Ambient temperature range: from -20°C to +35°C.


Total luminous flux at or above an angle of 90° [Lm]: 0  
 Emergency luminous flux [Lm]: /  
 Voltage [V]: 24  
 Life Time: 66,000h - L80 - B10 (Ta 40°C)  
 Number of optical assemblies: 1

**Optical assembly Characteristics Type 1**


Light Output Ratio (L.O.R.) [%]: 60  
 Lamp code: LED  
 ZVEI Code: LED  
 Nominal power [W]: 13  
 Nominal luminous [Lm]: 1240  
 Lamp maximum intensity [cd]: /  
 Beam angle [°]: 32°

Number of lamps for optical assembly: 1  
 Socket: /  
 Ballast losses [W]: 1  
 Colour temperature [K]: 4000  
 CRI: 80  
 Wavelength [Nm]: /  
 MacAdam Step: 3

**Polar**

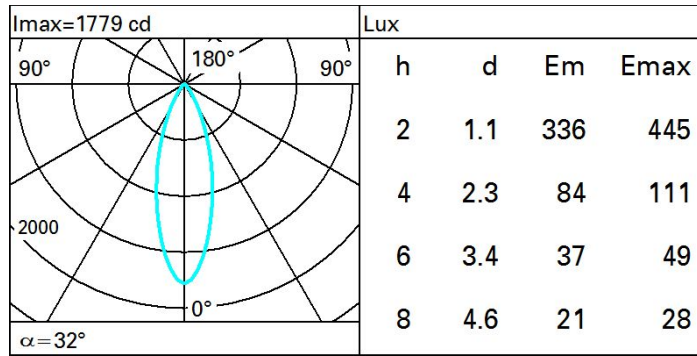

**Isolux**

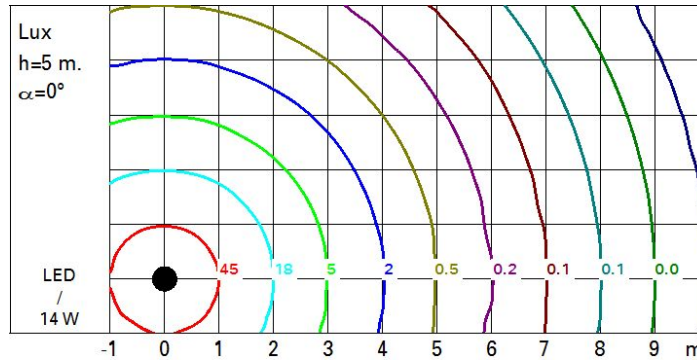

**UGR diagram**

Corrected UGR values (at 1240 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	9.9	10.6	10.2	10.8	11.1	9.9	10.6	10.2	10.8	11.1
	3H	10.1	10.7	10.4	11.0	11.2	9.9	10.5	10.3	10.8	11.1
	4H	10.1	10.7	10.5	11.0	11.3	9.9	10.5	10.3	10.8	11.1
	6H	10.1	10.6	10.5	11.0	11.3	9.9	10.4	10.2	10.7	11.0
	8H	10.1	10.6	10.5	10.9	11.3	9.8	10.3	10.2	10.7	11.0
	12H	10.1	10.6	10.5	10.9	11.3	9.8	10.3	10.2	10.6	11.0
4H	2H	9.9	10.5	10.3	10.8	11.1	10.1	10.7	10.5	11.0	11.3
	3H	10.1	10.6	10.5	11.0	11.3	10.2	10.7	10.6	11.0	11.4
	4H	10.2	10.6	10.6	11.0	11.4	10.2	10.6	10.6	11.0	11.4
	6H	10.3	10.6	10.7	11.0	11.5	10.2	10.6	10.6	11.0	11.4
	8H	10.3	10.6	10.7	11.0	11.5	10.2	10.5	10.6	10.9	11.4
	12H	10.3	10.6	10.7	11.0	11.4	10.1	10.4	10.6	10.9	11.3
8H	4H	10.2	10.5	10.6	10.9	11.4	10.3	10.6	10.7	11.0	11.5
	6H	10.3	10.5	10.7	11.0	11.5	10.3	10.6	10.8	11.0	11.5
	8H	10.3	10.5	10.8	11.0	11.5	10.3	10.5	10.8	11.0	11.5
	12H	10.3	10.5	10.8	11.0	11.5	10.3	10.5	10.8	11.0	11.5
12H	4H	10.1	10.4	10.6	10.9	11.3	10.3	10.6	10.7	11.0	11.4
	6H	10.2	10.5	10.7	10.9	11.4	10.3	10.5	10.8	11.0	11.5
	8H	10.3	10.5	10.8	11.0	11.5	10.3	10.5	10.8	11.0	11.5
Variations with the observer position at spacing:											
S =	1.0H	2.9 / -2.7					2.9 / -2.7				
	1.5H	5.2 / -3.5					5.2 / -3.5				
	2.0H	7.1 / -4.0					7.1 / -4.0				