



Last information update: May 2018

**Concrete wall/sill recessed, ø45mm luminaire without an electronic transformer - Warm White - 360° radial effect****Product code**

BU08

Technical description

Fixed, round, recessed luminaire designed for use with warm white LED lamps and a patented, 360° radial effect optic. Recessed luminaire consisting of a single die-cast aluminium body. The upper part is a heat sink which helps to dissipate the heat given off by the lamp. LED optics with a single methacrylate lens.

Installation

Recessed by means of a brass outer casing.

Dimension (mm)

Ø45x26

Colour

White (01) | Chrome (10) | Grey (15)

Weight (Kg)

0.08

Mounting

wall surface|ceiling surface


Wiring

Product supplied with an outlet cable L=200mm. Electronic ballast to be ordered separately.

Notes

Compatible with the Master Pro DMX control system. The chrome-coloured version of Trick (10) can only be used internally.

Complies with EN60598-1 and pertinent regulations

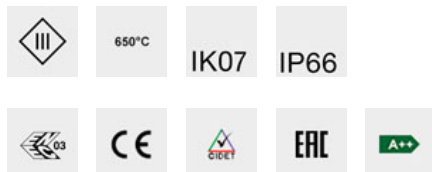**Product configuration: BU08****Product characteristics**

Total lighting output [Lm]: 234
Total power [W]: 4
Luminous efficacy [Lm/W]: 58.5
Life Time: 50,000h - L80 - B10 (Ta 25°C)
Number of optical assemblies: 1


Total luminous flux at or above an angle of 90° [Lm]: 130
Emergency luminous flux [Lm]: /
Voltage [V]: -
Ambient temperature range: from -20°C to +35°C.

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 45
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 4
Nominal luminous [Lm]: 520
Lamp maximum intensity [cd]: /
Beam angle [°]: /

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 0
Colour temperature [K]: 3000
CRI: 80
Wavelength [Nm]: /
MacAdam Step: 3

Polar

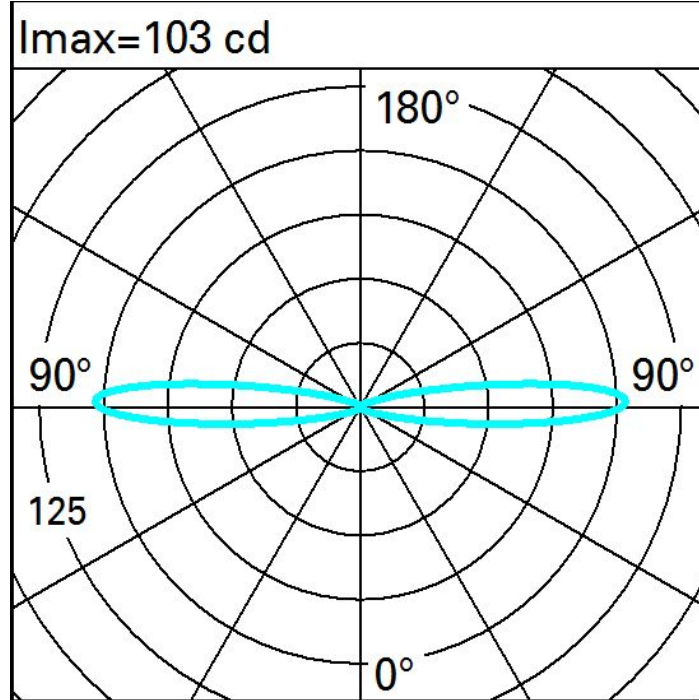

Isolux

