


Last information update: May 2018

**Wall/ceiling mounted, ø110mm luminaire with an electronic transformer - Warm White - 180° blade effect****Product code**
BU22**Technical description**

Wall and ceiling-mounted luminaire, designed for use with LED lamps and a patented, 180° blade effect optic. The product consists of a support base and screen. The base is made of phosphocromatization treated, die-cast aluminium, with a double base coat and passivation at 120°C. It is coated with liquid acrylic paint, cured at 150 °C to guarantee a high level of weather and UV ray resistance. The optic is made of methacrylate and fixed to the body via a zamak cover. All the screws used are made of A2 stainless steel.

Installation

Wall and ceiling mounted by means of a stainless steel wall fixture plate.

Dimension (mm)
Ø110x89**Colour**
White (01) | Grey (15)**Weight (Kg)**
0.56**Mounting**
wall surface|ceiling surface**Wiring**
Equipped with electronic ballast.**Notes**

Complete with lamp. On request available with LED cool white (6700K), red, green and amber.

Complies with EN60598-1 and pertinent regulations

**Product configuration: BU22****Product characteristics**

Total lighting output [Lm]: 88
Total power [W]: 3.9
Luminous efficacy [Lm/W]: 22.4
Life Time: 50,000h - L80 - B10 (Ta 25°C)
Number of optical assemblies: 1


Total luminous flux at or above an angle of 90° [Lm]: 1
Emergency luminous flux [Lm]: /
Voltage [V]: -
Ambient temperature range: from -20°C to +35°C.

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 25
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 2.9
Nominal luminous [Lm]: 350
Lamp maximum intensity [cd]: /
Beam angle [°]: /

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 1
Colour temperature [K]: 3000
CRI: 80
Wavelength [Nm]: /
MacAdam Step: 3

Polar

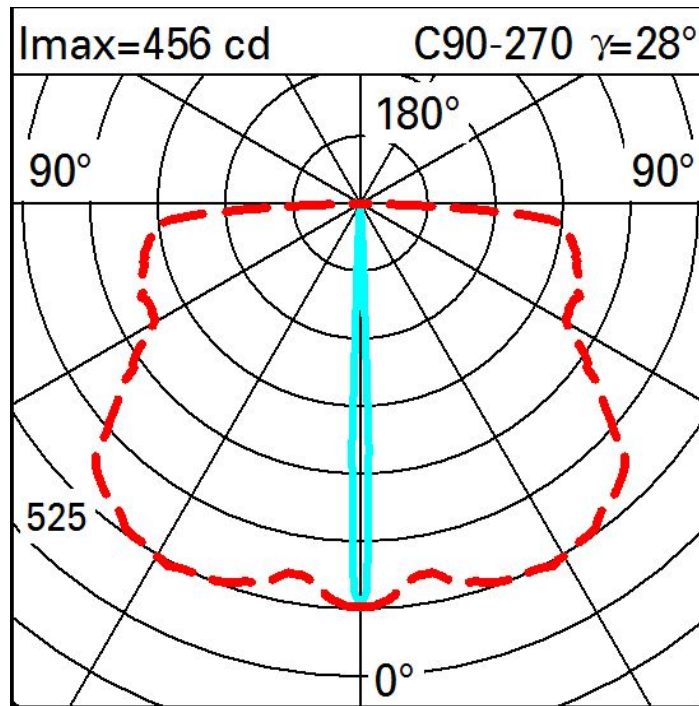

Isolux

