


Last information update: May 2018

**Wall/ceiling mounted, ø89mm luminaire without an electronic transformer - Warm White - Light blade effect****Product code**

BU28

Technical description

Wall and ceiling-mounted luminaire, designed for use with LED lamps and a patented, light blade effect optic. The product consists of a support base and screen. The base is made of phosphochromatization treated, die-cast aluminium, with a double base coat and passivation at 120°C. It is coated with liquid acrylic paint, cured at 150 °C to guarantee a high level of weather and UV ray resistance. The optic is made of methacrylate. All the screws used are made of A2 stainless steel.

Installation

Wall and ceiling mounted by means of a stainless steel wall fixture plate.

Dimension (mm)

Ø89x140

Colour

White (01) | Grey (15)

Weight (Kg)

0.5

Mounting

wall surface|ceiling surface


Wiring

Product supplied with an outlet cable L=200mm. Electronic ballast to be ordered separately.

Notes

Compatible with the Master Pro DMX control system.

Complies with EN60598-1 and pertinent regulations

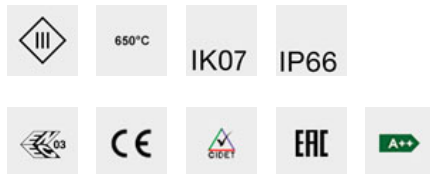**Product configuration: BU28****Product characteristics**


Total lighting output [Lm]: 29
 Total power [W]: 6
 Luminous efficacy [Lm/W]: 4.8
 Life Time: 50,000h - L80 - B10 (Ta 25°C)
 Number of optical assemblies: 1

Total luminous flux at or above an angle of 90° [Lm]: 27
 Emergency luminous flux [Lm]: /
 Voltage [V]: -
 Ambient temperature range: from -20°C to +35°C.


Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 4
 Lamp code: LED
 ZVEI Code: LED
 Nominal power [W]: 5.7
 Nominal luminous [Lm]: 720
 Lamp maximum intensity [cd]: /
 Beam angle [°]: /

Number of lamps for optical assembly: 1
 Socket: /
 Ballast losses [W]: 0.3
 Colour temperature [K]: 3000
 CRI: 80
 Wavelength [Nm]: /
 MacAdam Step: 3



Polar

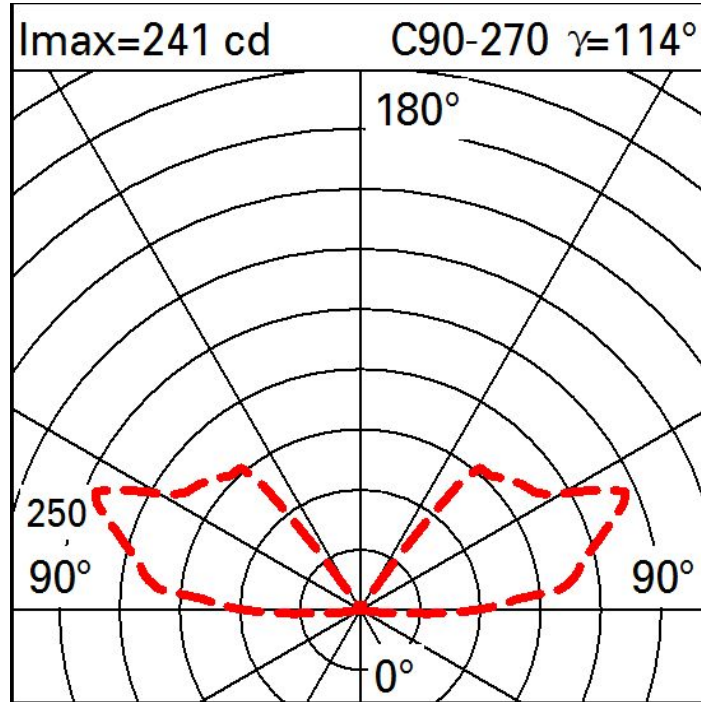

Isolux

