


Linealuce

Design Jean Michel Wilmotte

iGuzzini

Last information update: May 2018



Product code

BW19

Dimension (mm)

552x55x74

Colour

Grey (15)

Weight (Kg)

1.4

Mounting

wall recessed|ceiling recessed|ground recessed

Complies with EN60598-1 and pertinent regulations



Product configuration: BW19

Product characteristics

Total lighting output [Lm]: 317.9
Total power [W]: 7.4
Luminous efficacy [Lm/W]: 43
Life Time: 100,000h - L80 - B10 (Ta 25°C)
Ambient temperature range: from -20°C to +35°C.


Total luminous flux at or above an angle of 90° [Lm]: 0
Emergency luminous flux [Lm]: /
Voltage [V]: 24
Life Time: 66,000h - L80 - B10 (Ta 40°C)
Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 56
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 6.5
Nominal luminous [Lm]: 570
Lamp maximum intensity [cd]: /
Beam angle [°]: /

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 0.9
Colour temperature [K]: 3000
CRI: 80
Wavelength [Nm]: /
MacAdam Step: 3

Polar

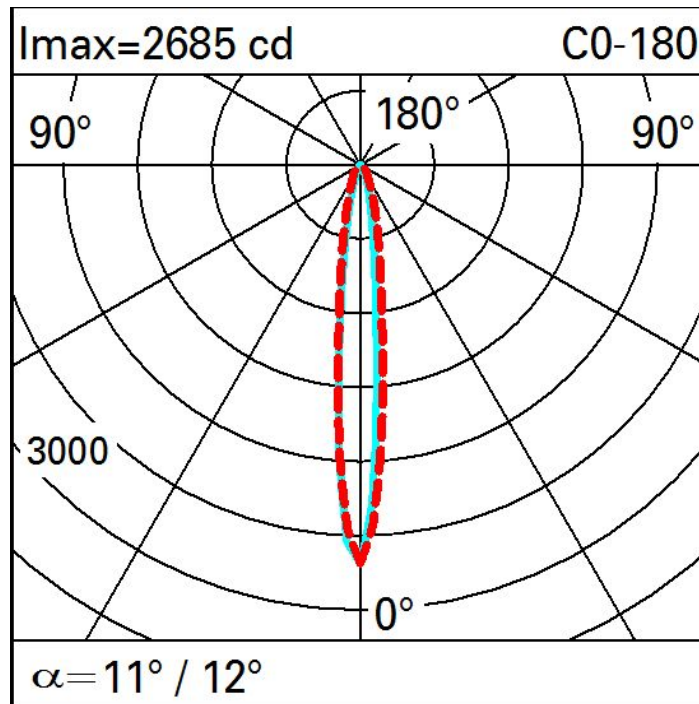

Illuminances

