


Last information update: May 2018



Pole-mounted system for urban and residential parks and gardens.

Product code

E247

Technical description

Outdoor luminaire with a street optic, designed to use LED lamps. The optical assembly and the pole attachment system are made of EN1706AC 46100LF aluminium alloy and subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The painting stage consists of a primer and a liquid acrylic paint, cured at 150 °C, with a high level of weather and UV ray resistance. Diffuser made of shockproof, UV-stabilised injection moulded polycarbonate. Complete with circuit featuring monochrome LEDs and optics with polymer multilayer lenses. Replaceable driver and LEDs. Electronic driver with Middle of the Night profile and automatic internal temperature control system. All external screws are made of stainless steel.

Installation

The spotlight can be installed with a pole-top mounting on poles with \varnothing 60mm and 76mm end part using X102 and X126 accessories. Secured to the pole by two bolts.

Dimension (mm)

Ø650x202

Colour

Grey (15)

Weight (Kg)

4.89

Mounting

pole-top


Wiring

The product is supplied wired and with an outlet cable 1500mm long.

Notes

Overvoltage protection: 9KV Common Mode, 6KV Differential Mode

Complies with EN60598-1 and pertinent regulations

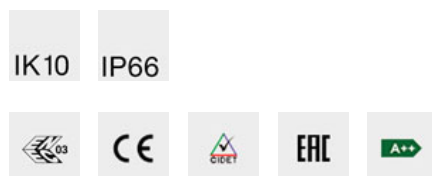

Product configuration: E247

Product characteristics

Total lighting output [Lm]: 2560
 Total power [W]: 31.3
 Luminous efficacy [Lm/W]: 81.8
 Life Time: 100,000h - L90 - B10 (Ta 25°C)
 Life Time: 100,000h - L90 - B10 (Ta 40°C)
 Ambient temperature range: from -20°C to +35°C. (*)

Total luminous flux at or above an angle of 90° [Lm]: 0
 Emergency luminous flux [Lm]: /
 Voltage [V]: -
 Life Time: 100,000h - L80 - B10 (Ta 25°C)
 Life Time: 100,000h - L80 - B10 (Ta 40°C)
 Number of optical assemblies: 1


* Preliminary data

Optical assembly Characteristics Type 1


Light Output Ratio (L.O.R.) [%]: 100
 Lamp code: LED
 ZVEI Code: LED
 Nominal power [W]: /
 Nominal luminous [Lm]: /
 Lamp maximum intensity [cd]: /
 Beam angle [°]: /

Number of lamps for optical assembly: 1
 Socket: /
 Ballast losses [W]: 4.3
 Colour temperature [K]: 3000
 CRI: 70
 Wavelength [Nm]: /
 MacAdam Step: 5

Polar

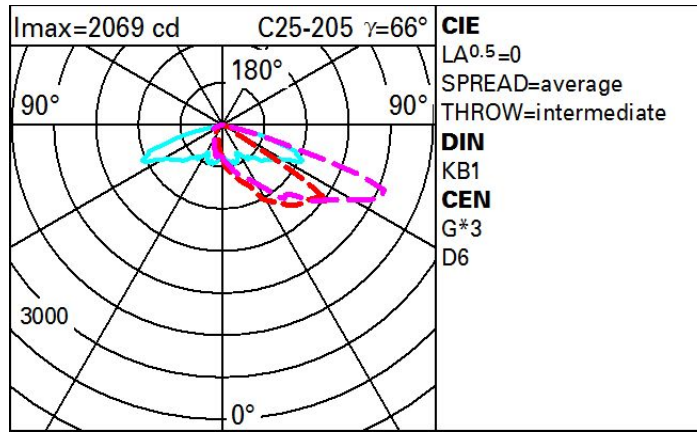

Isolux

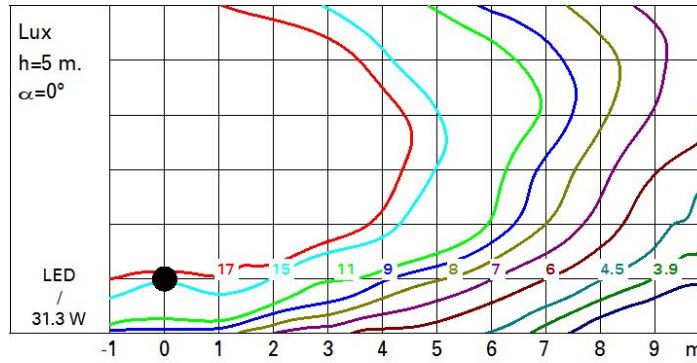

Utilisation factors

