


Last information update: June 2018

**Mini47 – Wall-/Ceiling-mounted – RGB – 48 Vdc DMX512-RDM – L=908mm – Flood optic****Product code**

EG80

Technical description

Direct light luminaire, designed to use RGB LED lamps, DMX512-RDM 48Vdc dimmable with searching and addressing function. Ceiling-, wall- or surface-mounted. Consists of a body and supports for installation, to be ordered separately. The body is made of extruded aluminium and includes die-cast aluminium end caps with 50/60 Shore A silicone seals. It is subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The following painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. The top of the optical assembly is closed by a 3 mm thick transparent glass screen, fixed with silicone. Complete with multi-LED plate in RGB colour and a 48V dc DMX512-RDM electronic driver (ballast to be ordered separately). Supplied with a double PG13.5 and outlet cables for pass-through wiring with IP68 male/female joiners. Fitted with a PMMA diffusing filter and optics with plastic (methacrylate) lens for Flood lighting. All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN 60598-1 standards and particular requirements.

Installation

Accessories are available for installation, like adjustable AISI304 stainless steel wall-mounted arms.

Dimension (mm)

908x47x77

Colour

Grey (15)

Weight (Kg)

2.55

Mounting

wall arm|wall surface|ceiling surface


Wiring

Complete with DMX-RDM 48-52Vdc control card. The product is supplied with a nickel-plated brass PG13.5 double cable gland with H07RN-F 5x1.5mm² rubber outlet cables for pass-through wiring with joiners (illegible part). Available for electrical connection and DMX-RDM control: IP68 5-pin female connector, IP68 5-pin male connector + closing cap (BZI6), and IP68 5-pin male + female connectors.

Notes

Product complete with LED lamp. DMX specifications require the insertion of a 120 Ohm terminating resistor to be placed between the DATA+ and DATA- cables of the last product in the line (BZQ7).

Complies with EN60598-1 and pertinent regulations

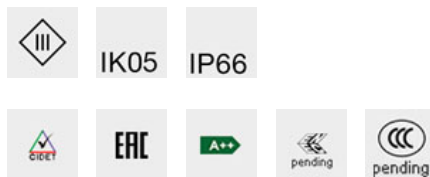**Product configuration: EG80****Product characteristics**

Total lighting output [Lm]: 1088
 Total power [W]: 39.9
 Luminous efficacy [Lm/W]: 27.3
 Life Time: 65,000h - L80 - B10 (Ta 25°C)
 Ambient temperature range: from -20°C to +35°C. (*)

* Preliminary data


Total luminous flux at or above an angle of 90° [Lm]: 0
 Emergency luminous flux [Lm]: /
 Voltage [V]: 48
 Life Time: 56,000h - L80 - B10 (Ta 40°C)
 Number of optical assemblies: 1

Optical assembly Characteristics Type 1


Light Output Ratio (L.O.R.) [%]: 68
 Lamp code: LED
 ZVEI Code: LED
 Nominal power [W]: 38
 Nominal luminous [Lm]: 1600
 Lamp maximum intensity [cd]: /
 Beam angle [°]: 32°

Number of lamps for optical assembly: 1
 Socket: /
 Ballast losses [W]: 1.9
 Colour temperature [K]: /
 CRI: /
 Wavelength [Nm]: /
 MacAdam Step: /

Polar

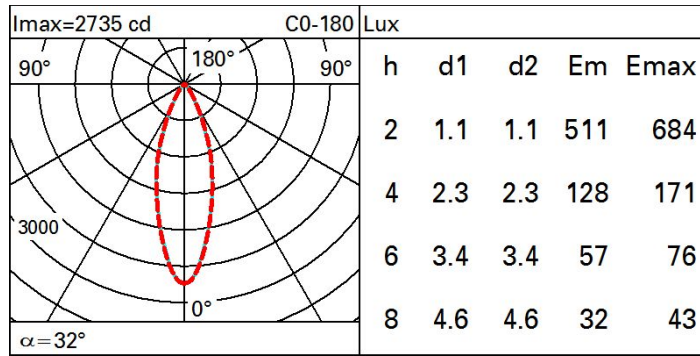

Isolux

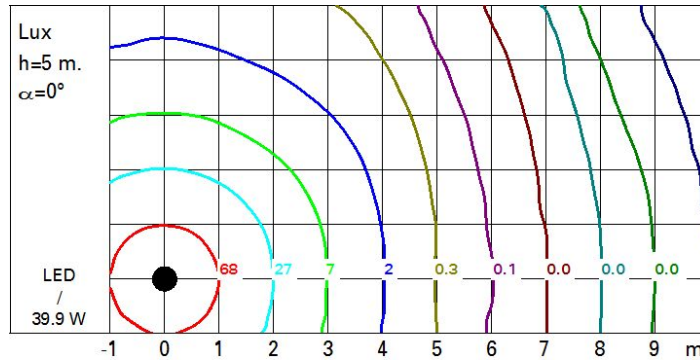

UGR diagram

Corrected UGR values (at 1000 lm bare lamp luminous flux)																
Reflect.:		viewed crosswise					viewed endwise									
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30					
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30					
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20					
Room dim																
x	y															
2H	2H	7.0	7.6	7.2	7.8	8.1	8.5	9.1	8.7	9.3	9.6					
	3H	6.9	7.4	7.2	7.7	8.0	8.3	8.9	8.7	9.2	9.5					
	4H	6.8	7.3	7.1	7.6	7.9	8.3	8.8	8.6	9.1	9.4					
	6H	6.7	7.2	7.1	7.5	7.9	8.2	8.7	8.6	9.0	9.3					
	8H	6.7	7.2	7.0	7.5	7.8	8.2	8.6	8.5	9.0	9.3					
	12H	6.6	7.1	7.0	7.4	7.8	8.1	8.6	8.5	8.9	9.3					
4H	2H	6.8	7.4	7.2	7.6	7.9	9.0	9.5	9.3	9.8	10.1					
	3H	6.7	7.2	7.1	7.5	7.8	8.9	9.3	9.3	9.7	10.0					
	4H	6.6	7.0	7.0	7.4	7.8	8.8	9.2	9.2	9.6	9.9					
	6H	6.6	6.9	7.0	7.3	7.7	8.7	9.1	9.1	9.5	9.9					
	8H	6.5	6.8	7.0	7.2	7.7	8.7	9.0	9.1	9.4	9.8					
	12H	6.5	6.8	6.9	7.2	7.6	8.6	8.9	9.1	9.3	9.8					
8H	4H	6.5	6.8	7.0	7.2	7.7	9.2	9.5	9.7	10.0	10.4					
	6H	6.4	6.7	6.9	7.1	7.6	9.1	9.4	9.6	9.8	10.3					
	8H	6.4	6.6	6.9	7.1	7.6	9.1	9.3	9.6	9.8	10.3					
	12H	6.3	6.5	6.8	7.0	7.5	9.0	9.2	9.5	9.7	10.2					
12H	4H	6.5	6.8	6.9	7.2	7.6	9.2	9.5	9.7	10.0	10.4					
	6H	6.4	6.6	6.9	7.1	7.6	9.2	9.4	9.6	9.8	10.3					
	8H	6.3	6.5	6.8	7.0	7.5	9.1	9.3	9.6	9.8	10.3					
Variations with the observer position at spacing:																
S =		1.0H					4.7 / -9.2					2.9 / -2.7				
		1.5H					7.4 / -11.0					5.3 / -3.3				
		2.0H					9.4 / -12.1					7.3 / -4.6				