

Last information update: April 2018



Round recessed luminaire - D=226 mm H=103 mm - neutral white - DALI ballast - general light optic

Product code

MB58

Technical description

Recessed fixed round luminaire designed to use a LED lamp. Version with rim for surface-mounting. Multi-faceted reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with 3000 lm DALI LED unit in a neutral white tone 4000K and driver separate from the luminaire. General light distribution.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

Dimension (mm)

Ø226x100

Colour

White/Aluminium (39)

Weight (Kg)

1.88

Mounting

ceiling recessed

Wiring

Product complete with DALI electronic components

Complies with EN60598-1 and pertinent regulations



IP20

IP23

On the visible part of the product once installed



Product configuration: MB58

Product characteristics

Total lighting output [Lm]: 2879
Total power [W]: 26.2
Luminous efficacy [Lm/W]: 109.9
Life Time: 50,000h - L80 - B10 (Ta 25°C)


Total luminous flux at or above an angle of 90° [Lm]: 0
Emergency luminous flux [Lm]: /
Voltage [V]: -
Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 96
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 23
Nominal luminous [Lm]: 3000
Lamp maximum intensity [cd]: /
Beam angle [°]: /

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 3.2
Colour temperature [K]: 4000
CRI: 80
Wavelength [Nm]: /
MacAdam Step: 3


Polar

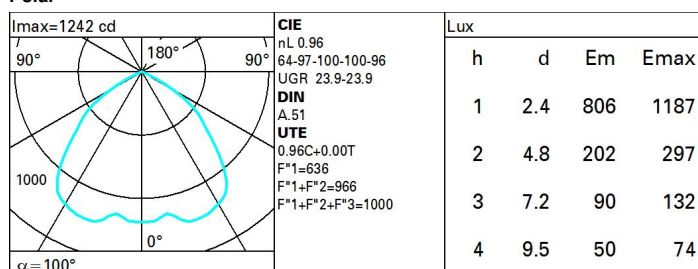

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	70	62	56	51	61	55	55	49	51
1.0	77	69	64	60	68	63	62	57	59
1.5	86	80	76	72	79	75	74	69	72
2.0	91	87	83	80	85	82	81	77	80
2.5	94	90	87	85	89	86	85	81	84
3.0	96	93	90	88	91	89	87	84	87
4.0	98	95	93	91	93	92	90	86	90
5.0	99	97	95	93	95	93	92	88	92

Luminance curve limit

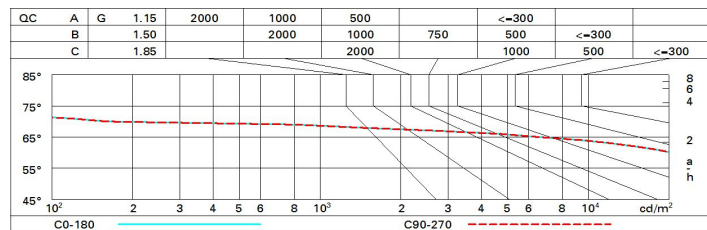

UGR diagram

Corrected UGR values (at 3000 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	24.1	25.1	24.4	25.3	25.6	24.1	25.1	24.4	25.3	25.6
	3H	24.0	24.9	24.4	25.2	25.4	24.3	25.1	24.6	25.4	25.7
	4H	24.0	24.7	24.3	25.0	25.3	24.2	25.0	24.5	25.3	25.6
	6H	23.9	24.6	24.2	24.9	25.2	24.1	24.8	24.5	25.2	25.5
	8H	23.8	24.5	24.2	24.9	25.2	24.1	24.8	24.5	25.1	25.4
	12H	23.8	24.4	24.2	24.8	25.2	24.0	24.7	24.4	25.0	25.4
4H	2H	24.2	25.0	24.5	25.3	25.6	24.0	24.7	24.3	25.0	25.3
	3H	24.1	24.7	24.5	25.1	25.4	24.1	24.7	24.4	25.0	25.4
	4H	24.0	24.6	24.4	24.9	25.3	24.0	24.6	24.4	24.9	25.3
	6H	23.9	24.4	24.3	24.8	25.2	23.9	24.4	24.3	24.8	25.2
	8H	23.9	24.3	24.3	24.7	25.2	23.9	24.3	24.3	24.7	25.2
	12H	23.8	24.2	24.3	24.7	25.1	23.8	24.2	24.3	24.7	25.1
8H	4H	23.9	24.3	24.3	24.7	25.2	23.9	24.3	24.3	24.7	25.2
	6H	23.8	24.1	24.3	24.6	25.1	23.8	24.1	24.3	24.6	25.1
	8H	23.7	24.0	24.2	24.5	25.0	23.7	24.0	24.2	24.5	25.0
	12H	23.7	24.0	24.2	24.4	25.0	23.7	24.0	24.2	24.4	25.0
12H	4H	23.8	24.2	24.3	24.7	25.1	23.8	24.2	24.3	24.7	25.1
	6H	23.7	24.0	24.2	24.5	25.0	23.7	24.0	24.2	24.5	25.0
	8H	23.7	24.0	24.2	24.4	25.0	23.7	24.0	24.2	24.4	25.0
Variations with the observer position at spacing:											
S =		1.0H	0.5 / -0.7				0.5 / -0.7				
		1.5H	1.5 / -5.0				1.5 / -5.0				
		2.0H	3.0 / -19.7				3.0 / -19.7				