

Last information update: April 2018



Round recessed luminaire - D=226 mm H=103 mm - neutral white - electronic ballast - general light optic with controlled luminance UGR<19

Product code

MB76

Technical description

Recessed fixed round luminaire designed to use a LED lamp. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with 3000 lm LED unit in a neutral white tone 4000K and electronic driver separate from the luminaire. Light distribution UGR<19 with controlled luminance.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

Dimension (mm)

Ø226x100

Colour

White/Aluminium (39)

Weight (Kg)

1.88

Mounting

ceiling recessed

Wiring

Product complete with electronic components

Complies with EN60598-1 and pertinent regulations

**Product configuration: MB76****Product characteristics**


Total lighting output [Lm]: 2758.8
 Total power [W]: 26.5
 Luminous efficacy [Lm/W]: 104.1
 Life Time: 50,000h - L80 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 0
 Emergency luminous flux [Lm]: /
 Voltage [V]: -
 Number of optical assemblies: 1


Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 92
 Lamp code: LED
 ZVEI Code: LED
 Nominal power [W]: 23
 Nominal luminous [Lm]: 3000
 Lamp maximum intensity [cd]: /
 Beam angle [°]: /

Number of lamps for optical assembly: 1
 Socket: /
 Ballast losses [W]: 3.5
 Colour temperature [K]: 4000
 CRI: 80
 Wavelength [Nm]: /
 MacAdam Step: 3




Polar

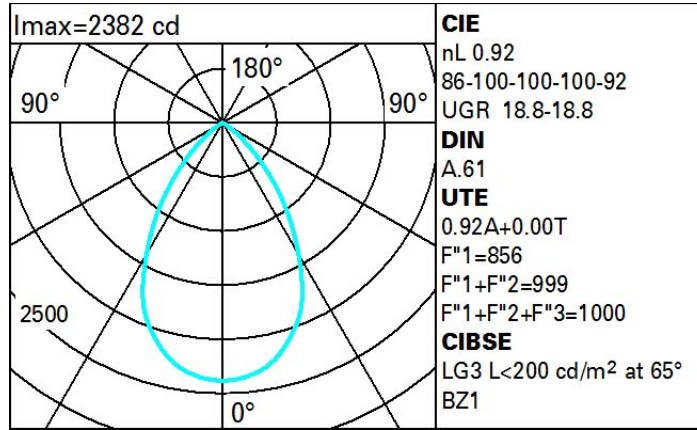

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	77	71	67	64	70	67	66	62	68
1.0	82	77	73	70	75	72	72	68	74
1.5	88	84	81	78	83	80	79	76	82
2.0	91	89	86	84	87	85	84	81	88
2.5	93	91	89	88	90	88	87	84	91
3.0	95	93	92	90	91	90	89	86	94
4.0	96	95	94	93	93	92	91	88	96
5.0	97	96	95	94	94	93	92	89	97

Luminance curve limit

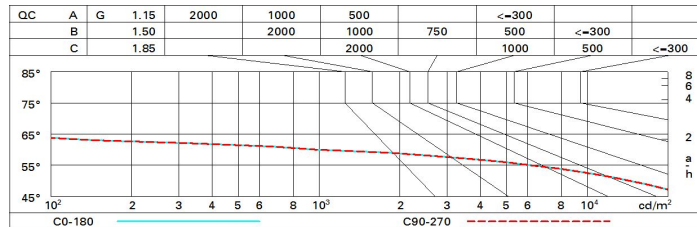

UGR diagram

Corrected UGR values (at 3000 lm bare lamp luminous flux)											
Reflect.:		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	19.3	20.0	19.6	20.3	20.5	19.3	20.0	19.6	20.3	20.5
	3H	19.2	19.8	19.5	20.1	20.4	19.2	19.9	19.5	20.1	20.4
	4H	19.1	19.7	19.4	20.0	20.3	19.1	19.7	19.5	20.0	20.3
	6H	19.0	19.6	19.4	19.9	20.2	19.1	19.6	19.4	19.9	20.3
	8H	19.0	19.5	19.4	19.9	20.2	19.0	19.5	19.4	19.9	20.2
	12H	19.0	19.5	19.3	19.8	20.2	19.0	19.5	19.4	19.8	20.2
4H	2H	19.1	19.7	19.5	20.0	20.3	19.1	19.7	19.4	20.0	20.3
	3H	19.0	19.5	19.4	19.8	20.2	19.0	19.5	19.4	19.8	20.2
	4H	18.9	19.3	19.3	19.7	20.1	18.9	19.3	19.3	19.7	20.1
	6H	18.8	19.2	19.2	19.6	20.0	18.8	19.2	19.2	19.6	20.0
	8H	18.8	19.1	19.2	19.5	20.0	18.8	19.1	19.2	19.5	20.0
	12H	18.7	19.0	19.2	19.5	19.9	18.7	19.0	19.2	19.5	19.9
8H	4H	18.8	19.1	19.2	19.5	20.0	18.8	19.1	19.2	19.5	20.0
	6H	18.7	19.0	19.1	19.4	19.9	18.7	19.0	19.1	19.4	19.9
	8H	18.6	18.9	19.1	19.3	19.8	18.6	18.9	19.1	19.3	19.8
	12H	18.6	18.8	19.1	19.3	19.8	18.6	18.8	19.1	19.3	19.8
12H	4H	18.7	19.0	19.2	19.5	19.9	18.7	19.0	19.2	19.5	19.9
	6H	18.6	18.9	19.1	19.3	19.8	18.6	18.9	19.1	19.3	19.8
	8H	18.6	18.8	19.1	19.3	19.8	18.6	18.8	19.1	19.3	19.8
Variations with the observer position at spacing:											
S =	1.0H	2.2 / -7.0					2.2 / -7.0				
	1.5H	4.6 / -30.0					4.6 / -30.0				
	2.0H	6.6 / -35.0					6.6 / -35.0				