

Last information update: April 2018



**Square recessed luminaire - 226x226 mm H=146 mm - LED neutral white - DALI ballast - general light optic with controlled luminance UGR<19**

**Product code**  
MC33

**Technical description**

Recessed fixed square luminaire designed to use a LED lamp. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with 3000 lm DALI LED unit in a neutral white tone 4000K and driver separate from the luminaire. General light distribution, with controlled luminance (UGR<19).

**Installation**

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

**Dimension (mm)**  
226x226x142

**Colour**  
White/Aluminium (39)

**Weight (Kg)**  
2.34

**Mounting**  
ceiling recessed

**Wiring**

Product complete with DALI electronic components

Complies with EN60598-1 and pertinent regulations



On the visible part of the product once installed

**Product configuration: MC33**

**Product characteristics**


Total lighting output [Lm]: 2728.5  
Total power [W]: 26.2  
Luminous efficacy [Lm/W]: 104.1  
Life Time: 50,000h - L80 - B10 (Ta 25 °C)

Total luminous flux at or above an angle of 90° [Lm]: 0  
Emergency luminous flux [Lm]: /  
Voltage [V]: -  
Number of optical assemblies: 1


**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 91  
Lamp code: LED  
ZVEI Code: LED  
Nominal power [W]: 23  
Nominal luminous [Lm]: 3000  
Lamp maximum intensity [cd]: /  
Beam angle [°]: /

Number of lamps for optical assembly: 1  
Socket: /  
Ballast losses [W]: 3.2  
Colour temperature [K]: 4000  
CRI: 80  
Wavelength [Nm]: /  
MacAdam Step: 3




**Polar**

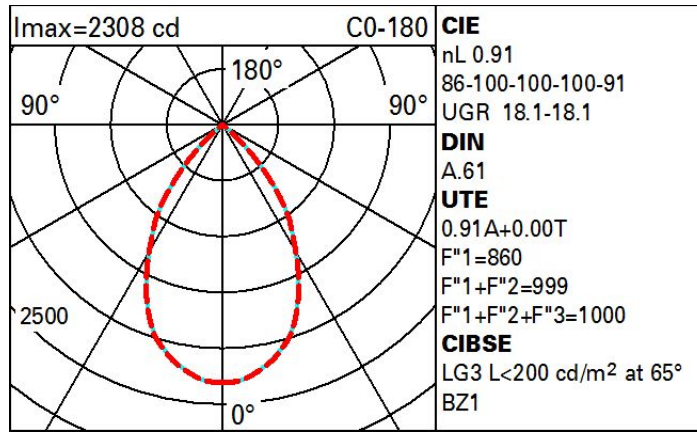

**Utilisation factors**

R	77	75	73	71	55	53	33	00	DRR
K0.8	76	71	67	64	70	66	66	62	68
1.0	81	76	72	69	75	71	71	67	74
1.5	87	83	80	78	82	79	78	75	83
2.0	90	88	85	83	86	84	83	80	88
2.5	92	90	88	87	89	87	86	83	92
3.0	94	92	91	89	90	89	88	85	94
4.0	95	94	93	92	92	91	90	87	96
5.0	96	95	94	93	93	92	91	88	97

**Luminance curve limit**

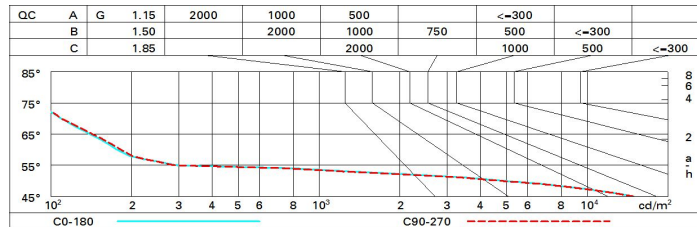

**UGR diagram**

Corrected UGR values (at 3000 lm bare lamp luminous flux)											
Reflect.:		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	18.6	19.4	18.9	19.6	19.8	18.6	19.4	18.9	19.6	19.8
	3H	18.5	19.1	18.8	19.4	19.7	18.5	19.2	18.8	19.4	19.7
	4H	18.4	19.0	18.8	19.3	19.6	18.4	19.0	18.8	19.3	19.6
	6H	18.3	18.9	18.7	19.2	19.5	18.4	18.9	18.7	19.2	19.6
	8H	18.3	18.8	18.7	19.2	19.5	18.3	18.9	18.7	19.2	19.5
	12H	18.3	18.8	18.6	19.1	19.5	18.3	18.8	18.7	19.1	19.5
4H	2H	18.4	19.0	18.8	19.3	19.6	18.4	19.0	18.7	19.3	19.6
	3H	18.3	18.8	18.7	19.1	19.5	18.3	18.8	18.7	19.1	19.5
	4H	18.2	18.6	18.6	19.0	19.4	18.2	18.6	18.6	19.0	19.4
	6H	18.1	18.5	18.5	18.9	19.3	18.1	18.5	18.5	18.9	19.3
	8H	18.1	18.4	18.5	18.8	19.3	18.1	18.4	18.5	18.8	19.3
	12H	18.0	18.3	18.5	18.8	19.2	18.0	18.3	18.5	18.8	19.2
8H	4H	18.1	18.4	18.5	18.8	19.3	18.1	18.4	18.5	18.8	19.3
	6H	18.0	18.3	18.5	18.7	19.2	18.0	18.3	18.4	18.7	19.2
	8H	17.9	18.2	18.4	18.6	19.1	17.9	18.2	18.4	18.6	19.1
	12H	17.9	18.1	18.4	18.6	19.1	17.9	18.1	18.4	18.6	19.1
12H	4H	18.0	18.3	18.5	18.8	19.2	18.0	18.3	18.5	18.8	19.2
	6H	17.9	18.2	18.4	18.6	19.1	17.9	18.2	18.4	18.6	19.1
	8H	17.9	18.1	18.4	18.6	19.1	17.9	18.1	18.4	18.6	19.1
Variations with the observer position at spacing:											
S =	1.0H	2.9 / -18.5					2.9 / -18.7				
	1.5H	4.3 / -25.8					4.3 / -25.6				
	2.0H	6.2 / -26.6					6.3 / -26.4				