


Last information update: June 2018



square recessed luminaire - warm white passive dissipation LED - integrated DALI control gear - medium

**Product code**

MP17

**Technical description**

Recessed adjustable removable luminaire for LED lamp with passive heat dissipation system. Square sheet steel perimeter frame. Main structure made of die-cast aluminium. Steel rotation hinges. Die-cast aluminium lamp body with shaped surface for high level radiant effect for effectively reducing the temperature and keeping the long-term LED lamp performance unchanged. Chrome-plated aluminium lamp body closing ring. Riflettore con ottica ad alta efficienza in alluminio superpuro - apertura medium. Orientamento del corpo con dispositivo di manovra manuale: interno 29° - esterno 75° - rorazione sull'asse 355°. Supplied with DALI dimmable control gear connected to the luminaire. Warm white high efficiency LED.

**Installation**

recessed using steel springs for false ceilings with thicknesses starting at 1 mm; preparation slot 142 x 142 mm

**Dimension (mm)**

151x151x96

**Colour**

White/Aluminium (39) | Grey/Black/Aluminium (E1)

**Weight (Kg)**

0.93

**Mounting**

ceiling recessed

**Wiring**

on control gear box with quick-coupling connections

Complies with EN60598-1 and pertinent regulations



IP20

**Product configuration: MP17****Product characteristics**

Total lighting output [Lm]: 1580  
 Total power [W]: 15.5  
 Luminous efficacy [Lm/W]: 101.9  
 Life Time: > 50,000h - L80 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 0  
 Emergency luminous flux [Lm]: /  
 Voltage [V]: -  
 Number of optical assemblies: 1

**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 79  
 Lamp code: LED  
 ZVEI Code: LED  
 Nominal power [W]: 13  
 Nominal luminous [Lm]: 2000  
 Lamp maximum intensity [cd]: /  
 Beam angle [°]: 22°

Number of lamps for optical assembly: 1  
 Socket: /  
 Ballast losses [W]: 2.5  
 Colour temperature [K]: 3000  
 CRI: 80  
 Wavelength [Nm]: /  
 MacAdam Step: 2


**Polar**

|  | CIE  |           | Lux |     |      |      |
|--|--|-----------|-----|-----|------|------|
|  | nL   | UGR       | h   | d   | Em   | Emax |
| I <sub>max</sub> =5315 cd<br>90° 180° 90°<br>6000<br>0°<br>α=22° | 0.79   | 15.4-15.4 | 2   | 0.8 | 1050 | 1329 |
|  | A.61   |           | 4   | 1.6 | 262  | 332  |
|  | 0.79A+0.00T  |           | 6   | 2.3 | 117  | 148  |
|  | F*1=954<br>F*1+F*2=997<br>F*1+F*2+F*3=1000                                 |           | 8   | 3.1 | 66   | 83   |
|  | CIBSE<br>LG3 L<1500 cd/m <sup>2</sup> at 65°<br>UGR<16   L<1500 cd/mq @65° |           |     |     |      |      |

Utilisation factors

| R    | 77 | 75 | 73 | 71 | 55 | 53 | 33 | 00 | DRR |
|------|----|----|----|----|----|----|----|----|-----|
| K0.8 | 70 | 66 | 63 | 61 | 65 | 62 | 62 | 59 | 75  |
| 1.0  | 73 | 70 | 67 | 65 | 69 | 66 | 66 | 63 | 80  |
| 1.5  | 77 | 75 | 72 | 71 | 74 | 72 | 71 | 68 | 87  |
| 2.0  | 80 | 78 | 76 | 75 | 77 | 75 | 74 | 72 | 91  |
| 2.5  | 81 | 80 | 79 | 78 | 79 | 78 | 77 | 75 | 94  |
| 3.0  | 82 | 81 | 80 | 80 | 80 | 79 | 78 | 76 | 96  |
| 4.0  | 84 | 83 | 82 | 81 | 81 | 81 | 80 | 78 | 98  |
| 5.0  | 84 | 83 | 83 | 83 | 82 | 82 | 80 | 78 | 99  |

Luminance curve limit

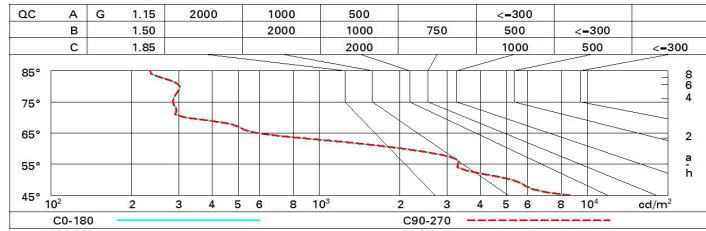

UGR diagram

| Corrected UGR values (at 2000 lm bare lamp luminous flux) |      |                  |      |      |      |             |                |      |      |      |      |
|---|------|------------------|------|------|------|-------------|----------------|------|------|------|------|
| Reflect.:   |      | viewed crosswise |      |      |      |             | viewed endwise |      |      |      |      |
| ceiling   | cav  | 0.70             | 0.70 | 0.50 | 0.50 | 0.30        | 0.70           | 0.70 | 0.50 | 0.50 | 0.30 |
| walls   |      | 0.50             | 0.30 | 0.50 | 0.30 | 0.30        | 0.50           | 0.30 | 0.50 | 0.30 | 0.30 |
| work pl.  |      | 0.20             | 0.20 | 0.20 | 0.20 | 0.20        | 0.20           | 0.20 | 0.20 | 0.20 | 0.20 |
| Room dim  |      | viewed crosswise |      |      |      |             | viewed endwise |      |      |      |      |
| x   | y    |                  |      |      |      |             |                |      |      |      |      |
| 2H  | 2H   | 16.3             | 17.9 | 16.6 | 18.2 | 18.5        | 16.3           | 17.9 | 16.6 | 18.2 | 18.5 |
|   | 3H   | 16.2             | 17.4 | 16.5 | 17.7 | 18.0        | 16.2           | 17.4 | 16.5 | 17.7 | 18.0 |
|   | 4H   | 16.1             | 17.2 | 16.4 | 17.5 | 17.8        | 16.1           | 17.2 | 16.5 | 17.5 | 17.8 |
|   | 6H   | 16.0             | 17.1 | 16.4 | 17.4 | 17.8        | 16.0           | 17.1 | 16.4 | 17.4 | 17.8 |
|   | 8H   | 15.9             | 17.0 | 16.3 | 17.4 | 17.7        | 15.9           | 17.0 | 16.3 | 17.4 | 17.8 |
| 12H   | 15.9 | 17.0             | 16.3 | 17.3 | 17.7 | 15.9        | 17.0           | 16.3 | 17.3 | 17.7 |      |
| 4H  | 2H   | 16.1             | 17.2 | 16.5 | 17.5 | 17.8        | 16.1           | 17.2 | 16.4 | 17.5 | 17.8 |
|   | 3H   | 15.9             | 17.0 | 16.3 | 17.3 | 17.7        | 15.9           | 17.0 | 16.3 | 17.3 | 17.7 |
|   | 4H   | 15.8             | 16.8 | 16.2 | 17.2 | 17.6        | 15.8           | 16.8 | 16.2 | 17.2 | 17.6 |
|   | 6H   | 15.6             | 16.8 | 16.0 | 17.3 | 17.7        | 15.6           | 16.8 | 16.0 | 17.3 | 17.7 |
|   | 8H   | 15.4             | 16.9 | 15.9 | 17.3 | 17.8        | 15.4           | 16.9 | 15.9 | 17.3 | 17.8 |
| 12H   | 15.3 | 16.9             | 15.8 | 17.3 | 17.8 | 15.3        | 16.9           | 15.8 | 17.3 | 17.8 |      |
| 8H  | 4H   | 15.4             | 16.9 | 15.9 | 17.3 | 17.8        | 15.4           | 16.9 | 15.9 | 17.3 | 17.8 |
|   | 6H   | 15.3             | 16.7 | 15.8 | 17.2 | 17.7        | 15.3           | 16.7 | 15.8 | 17.2 | 17.7 |
|   | 8H   | 15.3             | 16.5 | 15.8 | 17.0 | 17.5        | 15.3           | 16.5 | 15.8 | 17.0 | 17.5 |
|   | 12H  | 15.4             | 16.3 | 15.9 | 16.7 | 17.3        | 15.4           | 16.3 | 15.9 | 16.7 | 17.3 |
| 12H   | 4H   | 15.3             | 16.9 | 15.8 | 17.3 | 17.8        | 15.3           | 16.9 | 15.8 | 17.3 | 17.8 |
|   | 6H   | 15.3             | 16.5 | 15.8 | 17.0 | 17.5        | 15.3           | 16.5 | 15.8 | 17.0 | 17.5 |
|   | 8H   | 15.4             | 16.3 | 15.9 | 16.7 | 17.3        | 15.4           | 16.3 | 15.9 | 16.7 | 17.3 |
| Variations with the observer position at spacing:         |      |                  |      |      |      |             |                |      |      |      |      |
| S =   | 1.0H | 4.3 / -9.6       |      |      |      | 4.3 / -9.6  |                |      |      |      |      |
|   | 1.5H | 7.1 / -15.0      |      |      |      | 7.1 / -15.0 |                |      |      |      |      |
|   | 2.0H | 9.1 / -18.0      |      |      |      | 9.1 / -18.0 |                |      |      |      |      |