


Le Perroquet

Design Renzo Piano

iGuzzini

Last information update: June 2018



Medium body spotlight - warm white - electronic ballast and dimmer - wide flood optic

Product code
MP78

Technical description

Pendant luminaire equipped with a ballast unit made of die-cast aluminium and thermoplastic material. The pendant system consists of steel cables L=2000 that provide a simple mechanical anchoring system. Having been rotated and tilted, the luminaire can be locked mechanically in position to ensure efficient light aiming (even during maintenance operations). Luminaire for high output LED lamp with monochrome emission in a warm white colour tone (3000K). Dimmable electronic ballast. Equipped with an accessory holding ring designed to contain a flat accessory. Another external component can also be applied, selected from directional flaps and an asymmetric screen. All external accessories rotate 360° about the spotlight longitudinal axis.

Installation

Ceiling-mounted using the ballast unit included.

Dimension (mm)
Ø156x215

Colour
Grey (15)

Weight (Kg)
1.45

Mounting
ceiling pendant

Wiring

The dimmable electronic components are housed in the luminaire.

Complies with EN60598-1 and pertinent regulations



Product configuration: MP78

Product characteristics

Total lighting output [Lm]: 2406
Total power [W]: 28.9
Luminous efficacy [Lm/W]: 83.3
Life Time: 50,000h - L80 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 0
Emergency luminous flux [Lm]: /
Voltage [V]: -
Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 73
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 25
Nominal luminous [Lm]: 3300
Lamp maximum intensity [cd]: /
Beam angle [°]: 48°

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 3.9
Colour temperature [K]: 3000
CRI: 90
Wavelength [nm]: /
MacAdam Step: 2

Polar


Imax=4006 cd	Lux			
	h	d	Em	Emax
90°	2	1.8	787	1001
180°	4	3.6	197	250
0°	6	5.3	87	111
α = 48°	8	7.1	49	63

CIE
nL 0.73
99-100-100-100-73
UGR 14.3-14.3
DIN
A.61
UTE
0.73A+0.00T
F*1=989
F*1+F*2=998
F*1+F*2+F*3=1000
CIBSE
LG3 L<1500 cd/m² at 65°
UGR<16 | L<1500 cd/mq @65°

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	66	62	60	58	62	59	59	57	78
1.0	68	65	63	61	65	63	62	60	82
1.5	72	70	68	66	69	67	66	64	88
2.0	74	73	71	70	71	70	70	68	93
2.5	76	74	73	72	73	72	72	70	95
3.0	77	76	75	74	74	74	73	71	97
4.0	77	77	76	76	76	75	74	72	99
5.0	78	77	77	77	76	76	75	73	100

Luminance curve limit

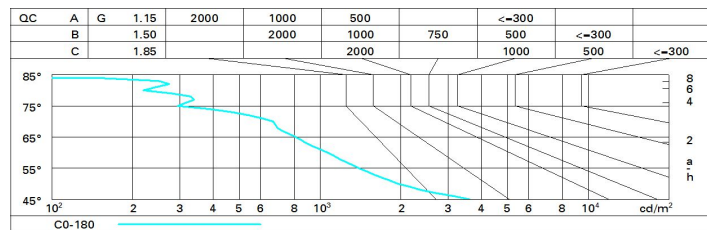

UGR diagram

Corrected UGR values (at 3300 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x y		viewed crosswise					viewed endwise				
2H	2H	14.9	15.4	15.1	15.6	15.9	14.9	15.4	15.1	15.6	15.9
	3H	14.7	15.2	15.0	15.5	15.8	14.7	15.2	15.0	15.5	15.8
	4H	14.7	15.1	15.0	15.4	15.7	14.7	15.1	15.0	15.4	15.7
	6H	14.6	15.0	14.9	15.3	15.6	14.6	15.0	14.9	15.3	15.6
	8H	14.6	15.0	14.9	15.3	15.6	14.5	15.0	14.9	15.3	15.6
	12H	14.5	14.9	14.9	15.2	15.6	14.5	14.9	14.9	15.2	15.6
4H	2H	14.7	15.1	15.0	15.4	15.7	14.7	15.1	15.0	15.4	15.7
	3H	14.5	14.9	14.9	15.2	15.6	14.5	14.9	14.9	15.2	15.6
	4H	14.4	14.8	14.8	15.1	15.5	14.4	14.8	14.8	15.1	15.5
	6H	14.3	14.6	14.8	15.0	15.5	14.3	14.6	14.8	15.0	15.5
	8H	14.3	14.6	14.7	15.0	15.4	14.3	14.6	14.7	15.0	15.4
	12H	14.2	14.5	14.7	14.9	15.4	14.2	14.5	14.7	14.9	15.4
8H	4H	14.3	14.6	14.7	15.0	15.4	14.3	14.6	14.7	15.0	15.4
	6H	14.2	14.4	14.7	14.9	15.4	14.2	14.4	14.7	14.9	15.4
	8H	14.1	14.3	14.6	14.8	15.3	14.1	14.3	14.6	14.8	15.3
	12H	14.1	14.3	14.6	14.8	15.3	14.1	14.3	14.6	14.8	15.3
12H	4H	14.2	14.5	14.7	14.9	15.4	14.2	14.5	14.7	14.9	15.4
	6H	14.1	14.3	14.6	14.8	15.3	14.1	14.3	14.6	14.8	15.3
	8H	14.1	14.3	14.6	14.8	15.3	14.1	14.3	14.6	14.8	15.3
Variations with the observer position at spacing:											
S =		1.0H	0.1 / -14.2				0.1 / -14.2				
		1.5H	0.9 / -15.7				0.9 / -15.7				
		2.0H	10.9 / -16.4				10.9 / -16.4				