


Last information update: May 2018



15 - cell Recessed luminaire - LED - Warm white - Incorporated DALI dimmable power supply - Flood optic

Product code
MQ84

Technical description

rectangular miniaturised recessed luminaire with 15 optical elements with LED lamps - fixed optics - flood beam angle. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised thermoplastic high definition optics, integrated in a rear position in the black anti-glare screen; the structure of the optical system prevents a pinpoint effect, allowing precise, circular light distribution and emission with controlled glare. Supplied with DALI dimmable electronic control gear connected to the luminaire. Warm white high colour rendering LED

Installation

recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 37 x 406

Dimension (mm)

413x44x54

Colour

White (01) | Black/Black (43) | Black/White (47) | Grey/Black (74)

Weight (Kg)

0.86

Mounting

wall recessed|ceiling recessed

Wiring

on control gear box with quick-coupling connections

Complies with EN60598-1 and pertinent regulations



Product configuration: MQ84

Product characteristics

Total lighting output [Lm]: 2036.7
Total power [W]: 35
Luminous efficacy [Lm/W]: 58.2
Life Time: 50,000h - L90 - B10 (Ta 25°C)


Total luminous flux at or above an angle of 90° [Lm]: 0
Emergency luminous flux [Lm]: /
Voltage [V]: -
Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 80
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 31
Nominal luminous [Lm]: 2550
Lamp maximum intensity [cd]: /
Beam angle [°]: 32°

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 4
Colour temperature [K]: 3000
CRI: 95
Wavelength [Nm]: /
MacAdam Step: 3

Polar

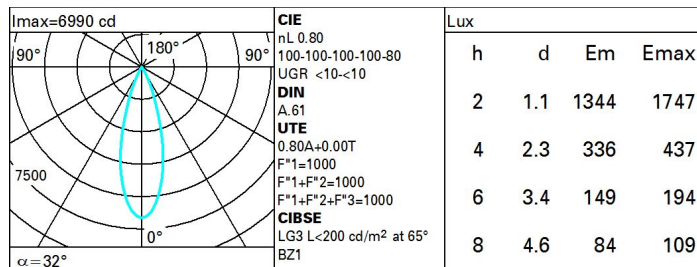

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	69	66	64	68	66	65	63	78
1.0	75	72	70	68	71	69	69	66	83
1.5	79	77	75	73	76	74	73	71	89
2.0	81	80	78	77	79	77	76	74	93
2.5	83	82	81	80	80	79	79	77	96
3.0	84	83	82	81	82	81	80	78	98
4.0	85	84	84	83	83	82	81	79	99
5.0	85	85	85	84	84	83	82	80	100

UGR diagram

Corrected UGR values (at 2550 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	-3.7	-3.2	-3.4	-3.0	-2.7	-3.7	-3.2	-3.4	-3.0	-2.7
	3H	-3.8	-3.4	-3.5	-3.1	-2.8	-3.8	-3.4	-3.5	-3.1	-2.8
	4H	-3.9	-3.5	-3.6	-3.2	-2.9	-3.9	-3.5	-3.6	-3.2	-2.9
	6H	-4.0	-3.6	-3.6	-3.3	-3.0	-4.0	-3.6	-3.6	-3.3	-3.0
	8H	-4.0	-3.6	-3.7	-3.3	-3.0	-4.0	-3.6	-3.7	-3.3	-3.0
	12H	-4.1	-3.7	-3.7	-3.4	-3.0	-4.1	-3.7	-3.7	-3.4	-3.0
4H	2H	-3.9	-3.5	-3.6	-3.2	-2.9	-3.9	-3.5	-3.6	-3.2	-2.9
	3H	-4.1	-3.7	-3.7	-3.4	-3.0	-4.1	-3.7	-3.7	-3.4	-3.0
	4H	-4.2	-3.8	-3.8	-3.5	-3.1	-4.2	-3.8	-3.8	-3.5	-3.1
	6H	-4.2	-4.0	-3.8	-3.6	-3.1	-4.2	-4.0	-3.8	-3.6	-3.1
	8H	-4.3	-4.0	-3.9	-3.6	-3.2	-4.3	-4.0	-3.9	-3.6	-3.2
	12H	-4.3	-4.1	-3.9	-3.7	-3.2	-4.3	-4.1	-3.9	-3.7	-3.2
8H	4H	-4.3	-4.0	-3.9	-3.6	-3.2	-4.3	-4.0	-3.9	-3.6	-3.2
	6H	-4.4	-4.2	-3.9	-3.7	-3.2	-4.4	-4.2	-3.9	-3.7	-3.2
	8H	-4.4	-4.3	-4.0	-3.8	-3.3	-4.4	-4.3	-4.0	-3.8	-3.3
	12H	-4.5	-4.3	-4.0	-3.8	-3.3	-4.5	-4.3	-4.0	-3.8	-3.3
12H	4H	-4.3	-4.1	-3.9	-3.7	-3.2	-4.3	-4.1	-3.9	-3.7	-3.2
	6H	-4.4	-4.3	-4.0	-3.8	-3.3	-4.4	-4.3	-4.0	-3.8	-3.3
	8H	-4.5	-4.3	-4.0	-3.8	-3.3	-4.5	-4.3	-4.0	-3.8	-3.3
Variations with the observer position at spacing:											
S =	1.0H	6.8 / -18.5					6.8 / -18.5				
	1.5H	9.6 / -18.7					9.6 / -18.7				
	2.0H	11.6 / -23.0					11.6 / -23.0				