


Cup

Design Roberto Pamio

iGuzzini

Last information update: May 2018



pendant - LED lamp - Warm White

Product code
MQ96

Technical description

Pendant luminaire for diffused lighting with mains voltage LED lamp. Thick pressed glass diffuser. Ceiling rose and technical elements made of aluminium and steel. Diffuser click-on coupling has a safety system to prevent accidental release of the glass. Steel suspension cable with millimetric adjustment system.

Installation

Ceiling rose element to be fixed to ceiling with screws and screw anchors.

Dimension (mm)
Ø103x193

Colour
White (01) | Grey (15)

Weight (Kg)
1.99

Mounting
ceiling pendant

Wiring

Three-pin terminal board on ceiling rose: quick-coupling connections

Complies with EN60598-1 and pertinent regulations



850°C

IP20



CE

RoHS

ERC

A++

Product configuration: MQ96

Product characteristics

Total lighting output [Lm]: 663
Total power [W]: 9.7
Luminous efficacy [Lm/W]: 68.4
Life Time: 50,000h - L70 (Ta 25°C)


Total luminous flux at or above an angle of 90° [Lm]: 87
Emergency luminous flux [Lm]: /
Voltage [V]: 230
Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 78
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 9.7
Nominal luminous [Lm]: 850
Lamp maximum intensity [cd]: /
Beam angle [°]: /

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 0
Colour temperature [K]: 2700
CRI: 80
Wavelength [nm]: /
MacAdam Step: /

Polar

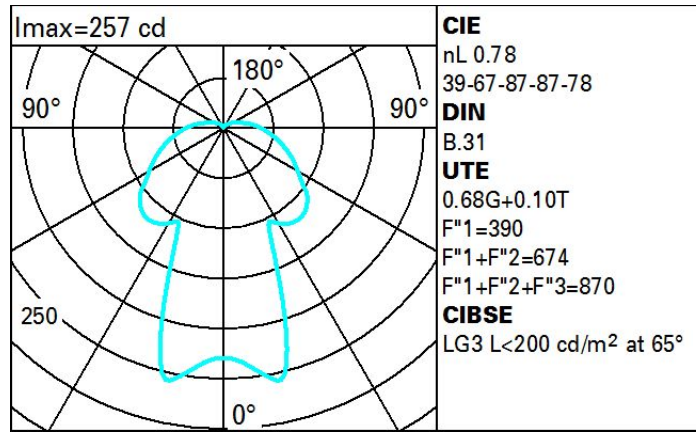

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	46	37	31	27	35	30	28	22	33
1.0	51	43	36	32	40	35	33	27	39
1.5	59	51	46	41	48	44	41	35	51
2.0	63	57	52	48	54	50	47	40	59
2.5	66	61	56	53	57	54	51	44	65
3.0	68	64	60	56	60	57	54	47	69
4.0	71	67	64	61	63	61	57	51	75
5.0	73	69	66	64	66	63	60	53	79