


Last information update: May 2018



Recessed DALI extractable-control gear

Product code
MS15

Technical description

Die-cast aluminium and thermoplastic material, recessed luminaire complete with C.O.B technology LED lamp in a 3000K warm white colour tone with high color rendering index. Luminaire with flood optic complete with high level light output and uniform distribution OPTIBEAM reflector. The product permits an internal rotation around the 335° vertical axis and the 65° horizontal plane with continuous friction (only on this rotation). Product complete with a DALI driver separate from the luminaire.

Installation

Recessed in false ceilings, with thicknesses starting from between 1 mm and 20 mm, using special steel torsion springs and hinged brackets.

Dimension (mm)
Ø190x132

Colour
White (01)

Weight (Kg)
1.46

Mounting
ceiling recessed

Wiring
product complete with DALI components

Notes

For compliance with the NFC 20-455 standard use an optional filter code MW57 for each optical assembly

Complies with EN60598-1 and pertinent regulations



Product configuration: MS15

Product characteristics

Total lighting output [Lm]: 1998
Total power [W]: 25.1
Luminous efficacy [Lm/W]: 79.6
Life Time: > 50,000h - L80 - B10 (Ta 25°C)


Total luminous flux at or above an angle of 90° [Lm]: 0
Emergency luminous flux [Lm]: /
Voltage [V]: -
Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 80
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 22
Nominal luminous [Lm]: 2500
Lamp maximum intensity [cd]: /
Beam angle [°]: 38°

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 3.1
Colour temperature [K]: 3000
CRI: 90
Wavelength [Nm]: /
MacAdam Step: 2


Polar

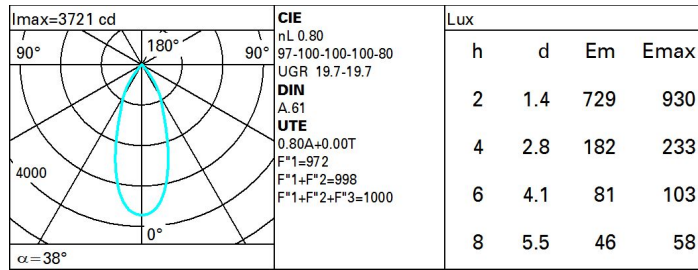

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	71	67	65	62	67	64	64	61	76
1.0	75	71	68	67	70	68	68	65	81
1.5	79	76	74	72	75	73	72	70	87
2.0	81	79	78	76	78	77	76	74	92
2.5	83	81	80	79	80	79	78	76	95
3.0	84	83	82	81	81	81	79	77	97
4.0	85	84	83	83	83	82	81	79	99
5.0	85	85	84	84	83	83	82	80	100

Luminance curve limit

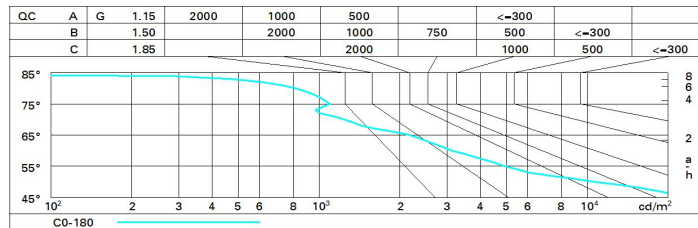

UGR diagram

Corrected UGR values (at 2500 lm bare lamp luminous flux)											
Reflect.:											
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed					viewed				
x	y	crosswise					endwise				
2H	2H	20.2	20.9	20.5	21.1	21.4	20.2	20.9	20.5	21.1	21.4
	3H	20.1	20.7	20.4	21.0	21.2	20.1	20.7	20.4	21.0	21.2
	4H	20.0	20.6	20.4	20.9	21.2	20.0	20.6	20.4	20.9	21.2
	6H	20.0	20.5	20.3	20.8	21.1	20.0	20.5	20.3	20.8	21.1
	8H	19.9	20.4	20.3	20.7	21.1	19.9	20.4	20.3	20.7	21.1
	12H	19.9	20.3	20.3	20.7	21.0	19.9	20.3	20.3	20.7	21.0
4H	2H	20.0	20.6	20.4	20.9	21.2	20.0	20.6	20.4	20.9	21.2
	3H	19.9	20.4	20.3	20.7	21.0	19.9	20.4	20.3	20.7	21.0
	4H	19.8	20.2	20.2	20.6	21.0	19.8	20.2	20.2	20.6	21.0
	6H	19.7	20.1	20.1	20.5	20.9	19.7	20.1	20.1	20.5	20.9
	8H	19.7	20.0	20.1	20.4	20.8	19.7	20.0	20.1	20.4	20.8
	12H	19.6	19.9	20.1	20.3	20.8	19.6	19.9	20.1	20.3	20.8
8H	4H	19.7	20.0	20.1	20.4	20.8	19.7	20.0	20.1	20.4	20.8
	6H	19.6	19.8	20.0	20.3	20.8	19.6	19.8	20.0	20.3	20.8
	8H	19.5	19.8	20.0	20.2	20.7	19.5	19.8	20.0	20.2	20.7
	12H	19.5	19.7	20.0	20.2	20.7	19.5	19.7	20.0	20.2	20.7
12H	4H	19.6	19.9	20.1	20.3	20.8	19.6	19.9	20.1	20.3	20.8
	6H	19.5	19.8	20.0	20.2	20.7	19.5	19.8	20.0	20.2	20.7
	8H	19.5	19.7	20.0	20.2	20.7	19.5	19.7	20.0	20.2	20.7
Variations with the observer position at spacing:											
S =	1.0H	5.2 / -14.1					5.2 / -14.1				
	1.5H	8.0 / -16.5					8.0 / -16.5				
	2.0H	10.0 / -18.5					10.0 / -18.5				