

Last information update: May 2018

**1196 X 296 mm - warm white LED - DALI control gear - controlled luminance optic UGR<19****Product code**

MT25

Technical description

Direct emission recessed or ceiling-mounted luminaire (with accessories ordered separately) designed to use warm white 3,000K high colour rendering LEDs. The optical assembly consists of a white extruded frame, a satin methacrylate diffuser screen for controlled luminance UGR<19 emission and a sheet metal rear closing base. The LEDs are arranged inside the perimeter and the electronic driver is housed in the upper part of the product.

Installation

Recessed mounted in plasterboard suspended ceilings (with accessory frame), in suspended ceilings with frame; can be ceiling-mounted with a kit to be ordered separately as an accessory

Dimension (mm)

1196x296x14

Colour

White (01)

Weight (Kg)

5.8

Mounting

ceiling recessed|wall surface|ceiling surface

Wiring

product complete with DALI components

Complies with EN60598-1 and pertinent regulations

**Product configuration: MT25****Product characteristics**


Total lighting output [Lm]: 3527.5
 Total power [W]: 39.4
 Luminous efficacy [Lm/W]: 89.5
 Life Time: 50,000h - L80 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 0
 Emergency luminous flux [Lm]: /
 Voltage [V]: -
 Number of optical assemblies: 1


Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 72
 Lamp code: LED
 ZVEI Code: LED
 Nominal power [W]: 31
 Nominal luminous [Lm]: 4900
 Lamp maximum intensity [cd]: /
 Beam angle [°]: /

Number of lamps for optical assembly: 1
 Socket: /
 Ballast losses [W]: 8.4
 Colour temperature [K]: 3000
 CRI: 80
 Wavelength [Nm]: /
 MacAdam Step: 3




Polar

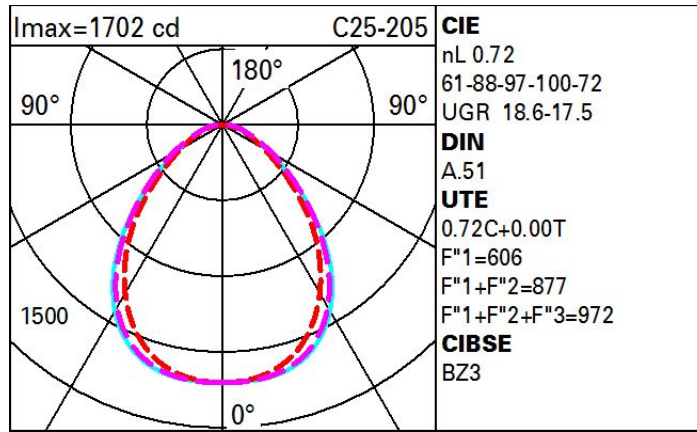

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	52	45	40	37	44	40	40	35	49
1.0	56	50	46	42	49	45	45	40	56
1.5	63	58	54	51	57	54	53	49	68
2.0	67	63	60	57	62	59	58	54	75
2.5	69	66	63	61	64	62	61	58	80
3.0	71	68	66	64	66	64	63	60	84
4.0	72	70	68	67	69	67	66	63	87
5.0	73	72	70	69	70	69	67	65	90

Luminance curve limit

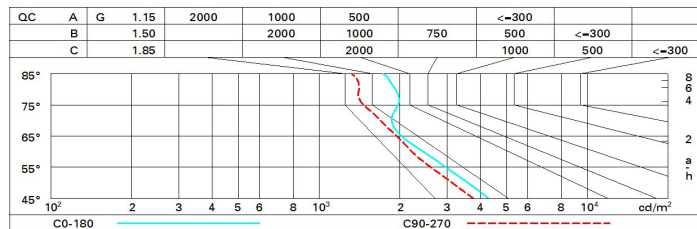

UGR diagram

Corrected UGR values (at 4900 lm bare lamp luminous flux)											
Reflect.:		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	16.0	17.0	16.3	17.3	17.5	15.4	16.4	15.7	16.7	16.9
	3H	16.8	17.8	17.2	18.0	18.3	15.7	16.6	16.1	16.9	17.2
	4H	17.3	18.1	17.6	18.4	18.7	15.8	16.7	16.2	17.0	17.3
	6H	17.7	18.4	18.0	18.8	19.1	15.8	16.6	16.2	16.9	17.3
	8H	17.8	18.6	18.2	18.9	19.2	15.8	16.6	16.2	16.9	17.2
	12H	17.9	18.6	18.3	19.0	19.3	15.8	16.5	16.2	16.8	17.2
4H	2H	16.3	17.2	16.7	17.5	17.8	16.6	17.4	16.9	17.7	18.0
	3H	17.3	18.0	17.7	18.4	18.8	17.1	17.8	17.5	18.2	18.5
	4H	17.9	18.5	18.3	18.9	19.3	17.3	17.9	17.7	18.3	18.7
	6H	18.4	19.0	18.9	19.4	19.8	17.4	18.0	17.9	18.4	18.8
	8H	18.6	19.1	19.1	19.6	20.0	17.5	18.0	17.9	18.4	18.8
	12H	18.8	19.3	19.2	19.7	20.2	17.5	17.9	17.9	18.4	18.8
8H	4H	18.0	18.5	18.4	18.9	19.4	17.9	18.4	18.3	18.8	19.3
	6H	18.7	19.1	19.2	19.6	20.1	18.2	18.6	18.6	19.0	19.5
	8H	19.0	19.4	19.5	19.9	20.4	18.3	18.7	18.8	19.1	19.6
	12H	19.3	19.6	19.8	20.1	20.6	18.4	18.7	18.9	19.2	19.7
12H	4H	18.0	18.5	18.4	18.9	19.4	18.0	18.5	18.5	18.9	19.4
	6H	18.8	19.1	19.2	19.6	20.1	18.3	18.7	18.8	19.2	19.7
	8H	19.1	19.5	19.6	19.9	20.5	18.5	18.8	19.0	19.3	19.9
Variations with the observer position at spacing:											
S =	1.0H	0.2 / -0.3					0.2 / -0.3				
	1.5H	0.4 / -0.9					0.4 / -0.9				
	2.0H	1.0 / -1.2					0.9 / -1.3				