

Last information update: May 2018



Fixed circular recessed luminaire - Ø75 mm - warm white - flood optic - UGR<19

Product code
MV44

Technical description

Fixed round luminaire designed to use a LED lamp with C.O.B. technology. Version without rim for mounting flush with ceiling. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with LED lamp in warm white colour tone CRI90 (3000K). General light emission, with controlled luminance UGR<19 1500 cd/m² α>65° flood optic.

Installation

Installation flush with the ceiling is for false ceilings 12.5 mm thick

Dimension (mm)

Ø69x90

Colour

Aluminium (12)

Weight (Kg)

0.42


Mounting

ceiling recessed

Wiring

product complete with DALI components

Complies with EN60598-1 and pertinent regulations



Product configuration: MV44

Product characteristics

Total lighting output [Lm]: 778
Total power [W]: 10.1
Luminous efficacy [Lm/W]: 77.1
Life Time: 50,000h - L80 - B10 (Ta 25°C)


Total luminous flux at or above an angle of 90° [Lm]: 0
Emergency luminous flux [Lm]: /
Voltage [V]: -
Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 78
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 8
Nominal luminous [Lm]: 1000
Lamp maximum intensity [cd]: /
Beam angle [°]: 28°

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 2.1
Colour temperature [K]: 3000
CRI: 90
Wavelength [Nm]: /
MacAdam Step: 2


Polar

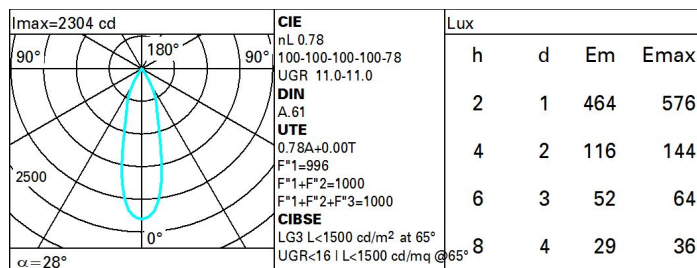

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	70	67	64	62	66	64	63	61	78
1.0	73	70	68	66	69	67	67	64	83
1.5	77	75	73	71	74	72	71	69	89
2.0	79	78	76	75	76	75	74	72	93
2.5	81	79	78	78	78	77	77	74	96
3.0	82	81	80	79	80	79	78	76	98
4.0	83	82	82	81	81	80	79	77	99
5.0	83	83	82	82	81	81	80	78	100

Luminance curve limit

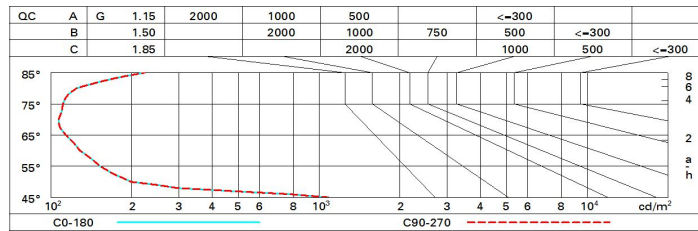

UGR diagram

Corrected UGR values (at 1000 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceill/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	12.0	14.0	12.3	14.3	14.6	12.0	14.0	12.3	14.3	14.6
	3H	11.8	13.4	12.2	13.7	14.0	11.8	13.4	12.2	13.7	14.0
	4H	11.7	13.1	12.1	13.5	13.8	11.7	13.1	12.1	13.5	13.8
	6H	11.6	12.9	12.0	13.2	13.6	11.6	12.9	12.0	13.2	13.6
	8H	11.6	12.8	12.0	13.2	13.5	11.6	12.8	12.0	13.2	13.5
	12H	11.6	12.7	12.0	13.1	13.5	11.6	12.7	12.0	13.1	13.5
4H	2H	11.7	13.1	12.1	13.5	13.8	11.7	13.1	12.1	13.5	13.8
	3H	11.6	12.7	12.0	13.1	13.5	11.6	12.7	12.0	13.1	13.5
	4H	11.5	12.5	11.9	12.9	13.3	11.5	12.5	11.9	12.9	13.3
	6H	11.2	12.7	11.6	13.1	13.6	11.2	12.7	11.6	13.1	13.6
	8H	11.0	12.8	11.5	13.2	13.7	11.0	12.8	11.5	13.2	13.7
	12H	10.9	12.8	11.4	13.2	13.8	10.9	12.8	11.4	13.2	13.7
8H	4H	11.0	12.8	11.5	13.2	13.7	11.0	12.8	11.5	13.2	13.7
	6H	10.9	12.6	11.4	13.1	13.6	10.9	12.6	11.4	13.1	13.6
	8H	10.9	12.4	11.4	12.9	13.4	10.9	12.4	11.4	12.9	13.4
	12H	11.0	12.0	11.5	12.5	13.0	11.0	12.0	11.5	12.5	13.0
12H	4H	10.9	12.8	11.4	13.2	13.7	10.9	12.8	11.4	13.2	13.8
	6H	10.9	12.4	11.4	12.9	13.4	10.9	12.4	11.4	12.9	13.4
	8H	11.0	12.0	11.5	12.5	13.0	11.0	12.0	11.5	12.5	13.0
Variations with the observer position at spacing:											
S =	1.0H	6.3 / -21.8					6.3 / -21.8				
	1.5H	9.1 / -22.1					9.1 / -22.1				
	2.0H	11.1 / -22.3					11.1 / -22.3				