

Reflex

Design iGuzzini

iGuzzini

Last information update: May 2018



Fixed circular recessed luminaire - Ø125 mm - neutral white - flood optic - UGR<19

Product code
MV58

Technical description

Fixed round luminaire designed to use a LED lamp with C.O.B. technology. Version without rim for mounting flush with ceiling. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with LED lamp in neutral white colour tone (4,000K). General light emission, with controlled luminance UGR<19 1500 cd/m² α>65° flood optic.

Installation

Installation flush with the ceiling is for false ceilings 12.5 mm thick

Dimension (mm)

Ø123x111

Colour

Aluminium (12)

Weight (Kg)

1.08

Mounting

ceiling recessed

Wiring

product complete with an electronic ballast

Complies with EN60598-1 and pertinent regulations



IP20



IP43

On the visible part of the product once installed



Product configuration: MV58

Product characteristics

Total lighting output [Lm]: 1757
Total power [W]: 14.9
Luminous efficacy [Lm/W]: 117.9
Life Time: 50,000h - L80 - B10 (Ta 25°C)


Total luminous flux at or above an angle of 90° [Lm]: 0
Emergency luminous flux [Lm]: /
Voltage [V]: -
Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 88
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 13
Nominal luminous [Lm]: 2000
Lamp maximum intensity [cd]: /
Beam angle [°]: 24°

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 1.9
Colour temperature [K]: 4000
CRI: 80
Wavelength [Nm]: /
MacAdam Step: 2


Polar

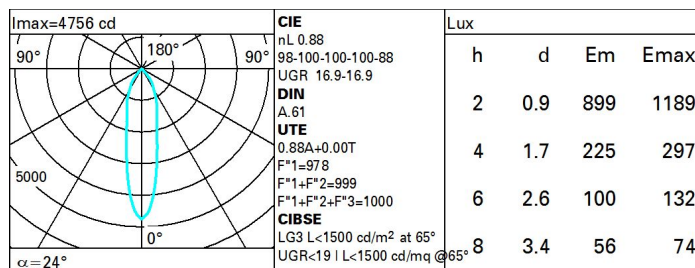

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	79	74	71	69	74	71	70	68	77
1.0	82	78	76	73	77	75	75	72	82
1.5	86	84	81	79	83	81	80	77	88
2.0	89	87	85	84	86	84	83	81	92
2.5	91	89	88	87	88	87	86	84	95
3.0	92	91	90	89	89	89	88	85	97
4.0	93	92	92	91	91	90	89	87	99
5.0	94	93	93	92	92	91	90	88	100

Luminance curve limit

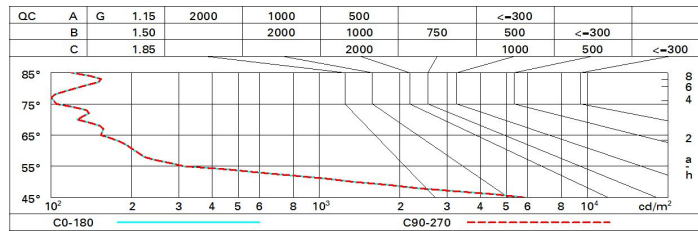

UGR diagram

Corrected UGR values (at 2000 lm bare lamp luminous flux)												
Reflect.:		viewed crosswise					viewed endwise					
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
Room dim												
x	y											
2H	2H	17.5	18.1	17.8	18.4	18.6	17.5	18.1	17.8	18.4	18.6	
	3H	17.3	17.9	17.6	18.2	18.5	17.3	17.9	17.6	18.2	18.5	
	4H	17.3	17.8	17.6	18.1	18.4	17.3	17.8	17.6	18.1	18.4	
	6H	17.2	17.7	17.5	18.0	18.3	17.2	17.7	17.5	18.0	18.3	
	8H	17.1	17.6	17.5	18.0	18.3	17.1	17.6	17.5	18.0	18.3	
	12H	17.1	17.6	17.5	17.9	18.3	17.1	17.6	17.5	17.9	18.3	
4H	2H	17.3	17.8	17.6	18.1	18.4	17.3	17.8	17.6	18.1	18.4	
	3H	17.1	17.6	17.5	17.9	18.3	17.1	17.6	17.5	17.9	18.3	
	4H	17.0	17.4	17.4	17.8	18.2	17.0	17.4	17.4	17.8	18.2	
	6H	16.9	17.3	17.4	17.7	18.1	16.9	17.3	17.4	17.7	18.1	
	8H	16.9	17.2	17.3	17.6	18.1	16.9	17.2	17.3	17.6	18.1	
	12H	16.8	17.1	17.3	17.6	18.0	16.8	17.1	17.3	17.6	18.0	
8H	4H	16.9	17.2	17.3	17.6	18.1	16.9	17.2	17.3	17.6	18.1	
	6H	16.8	17.1	17.3	17.5	18.0	16.8	17.1	17.3	17.5	18.0	
	8H	16.7	17.0	17.2	17.4	17.9	16.7	17.0	17.2	17.4	17.9	
	12H	16.7	16.9	17.2	17.4	17.9	16.7	16.9	17.2	17.4	17.9	
12H	4H	16.8	17.1	17.3	17.6	18.0	16.8	17.1	17.3	17.6	18.0	
	6H	16.7	17.0	17.2	17.4	17.9	16.7	17.0	17.2	17.4	17.9	
	8H	16.7	16.9	17.2	17.4	17.9	16.7	16.9	17.2	17.4	17.9	
Variations with the observer position at spacing:												
S =	1.0H		4.4	/ -24.6					4.4	/ -24.6		
	1.5H		7.2	/ -25.8					7.2	/ -25.8		
	2.0H		9.2	/ -26.2					9.2	/ -26.2		