


Last information update: May 2018



adjustable luminaire - Ø 75 mm - warm white DALI - flood optic - minimal

Product code
N032

Technical description

Round adjustable luminaire designed to use an LED lamp with C.O.B. technology in a warm white colour tone 2,700K CRI 90. Version without rim for mounting flush with ceiling. Lower reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Anodised aluminium upper reflector. Black, zinc-plated sheet steel bracket. The luminaire can be rotated 30° relative to the horizontal plane and 358° about the vertical axis. The luminaire is fitted with mechanical locks for light beam aiming. Painted extruded aluminium dissipater.

Installation

Installation flush with the ceiling is for false ceilings 12.5 mm thick

Dimension (mm)
Ø69x126


Colour
Aluminium (12)

Weight (Kg)
0.45

Mounting
ceiling recessed

Wiring
Product complete with DALI components

Complies with EN60598-1 and pertinent regulations



IP20

IP23

**Product configuration: N032****Product characteristics**


Total lighting output [Lm]: 239.7
Total power [W]: 11
Luminous efficacy [Lm/W]: 21.8
Life Time: 50,000h - L80 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 0
Emergency luminous flux [Lm]: /
Voltage [V]: -
Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 24
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 8.7
Nominal luminous [Lm]: 1000
Lamp maximum intensity [cd]: /
Beam angle [°]: 30° / 31°


Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 2.3
Colour temperature [K]: 2700
CRI: 90
Wavelength [Nm]: /
MacAdam Step: 2

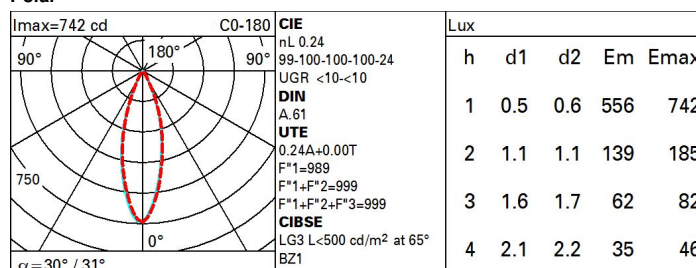Polar

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	22	20	20	19	20	19	19	19	78
1.0	23	22	21	20	21	21	20	20	82
1.5	24	23	22	22	23	22	22	21	88
2.0	24	24	23	23	24	23	23	22	93
2.5	25	24	24	24	24	24	24	23	95
3.0	25	25	25	24	24	24	24	23	97
4.0	25	25	25	25	25	25	24	24	99
5.0	26	25	25	25	25	25	25	24	100

Luminance curve limit

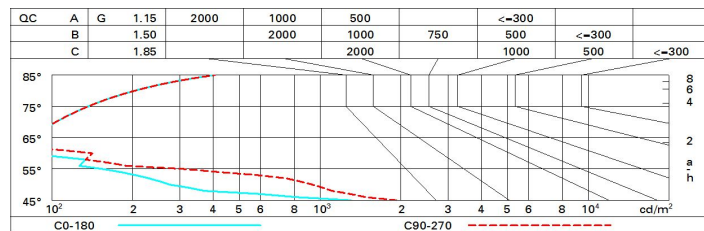

UGR diagram

Corrected UGR values (at 1000 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	7.3	7.8	7.5	8.0	8.3	8.0	8.6	8.3	8.8	9.0
	3H	7.1	7.6	7.4	7.9	8.2	7.9	8.4	8.2	8.6	8.9
	4H	7.1	7.5	7.4	7.8	8.1	7.8	8.3	8.1	8.6	8.9
	6H	7.0	7.4	7.3	7.7	8.1	7.7	8.2	8.1	8.5	8.8
	8H	7.0	7.4	7.3	7.7	8.0	7.7	8.1	8.0	8.4	8.8
	12H	6.9	7.3	7.3	7.7	8.0	7.6	8.0	8.0	8.4	8.7
4H	2H	7.0	7.5	7.4	7.8	8.1	7.8	8.3	8.1	8.6	8.9
	3H	6.9	7.3	7.3	7.6	8.0	7.6	8.1	8.0	8.4	8.7
	4H	6.8	7.2	7.2	7.5	7.9	7.6	7.9	8.0	8.3	8.7
	6H	6.8	7.1	7.2	7.5	7.9	7.5	7.8	7.9	8.2	8.6
	8H	6.7	7.0	7.2	7.4	7.9	7.4	7.7	7.9	8.1	8.6
	12H	6.7	7.0	7.2	7.4	7.9	7.4	7.6	7.8	8.1	8.5
8H	4H	6.7	7.0	7.1	7.4	7.8	7.5	7.7	7.9	8.2	8.6
	6H	6.6	6.9	7.1	7.3	7.8	7.4	7.6	7.8	8.1	8.5
	8H	6.6	6.8	7.1	7.3	7.8	7.3	7.5	7.8	8.0	8.5
	12H	6.6	6.8	7.1	7.3	7.8	7.3	7.5	7.8	8.0	8.5
12H	4H	6.6	6.9	7.1	7.3	7.8	7.4	7.7	7.9	8.1	8.6
	6H	6.6	6.8	7.1	7.3	7.8	7.4	7.6	7.8	8.0	8.5
	8H	6.6	6.7	7.1	7.2	7.7	7.3	7.5	7.8	8.0	8.5
Variations with the observer position at spacing:											
S =	1.0H	5.3 / -10.2					4.8 / -10.3				
	1.5H	8.1 / -10.5					7.6 / -11.2				
	2.0H	10.1 / -10.7					9.6 / -11.4				