


Last information update: May 2018

**wall-washer luminaire - Ø 125 mm - warm white - minimal****Product code**

N115

**Technical description**

Recessed round wall-washer luminaire designed to use a LED lamp with C.O.B. technology. Version without rim for mounting flush with ceiling. Reflector vacuum-metallised with aluminium vapours and finished with a protective anti-scratch layer to create a vertical downward beam of light. Die-cast aluminium body and passive dissipation system. Product complete with C.O.B. LED lamp in warm white colour tone 3000K (CRI 90).

**Installation**

Installation flush with the ceiling is for false ceilings 12.5 mm thick

**Dimension (mm)**

Ø123x111

**Colour**

Aluminium (12)

**Weight (Kg)**

1.08

**Mounting**

ceiling recessed

**Wiring**

product complete with DALI components

Complies with EN60598-1 and pertinent regulations



IP20

IP43

On the visible part of the product once installed

**Product configuration: N115****Product characteristics**

Total lighting output [Lm]: 1240  
Total power [W]: 18.9  
Luminous efficacy [Lm/W]: 65.6  
Life Time: 50,000h - L80 - B10 (Ta 25°C)


Total luminous flux at or above an angle of 90° [Lm]: 0  
Emergency luminous flux [Lm]: /  
Voltage [V]: -  
Number of optical assemblies: 1

**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 62  
Lamp code: LED  
ZVEI Code: LED  
Nominal power [W]: 17  
Nominal luminous [Lm]: 2000  
Lamp maximum intensity [cd]: /  
Beam angle [°]: /

Number of lamps for optical assembly: 1  
Socket: /  
Ballast losses [W]: 1.9  
Colour temperature [K]: 3000  
CRI: 90  
Wavelength [Nm]: /  
MacAdam Step: 2

Polar

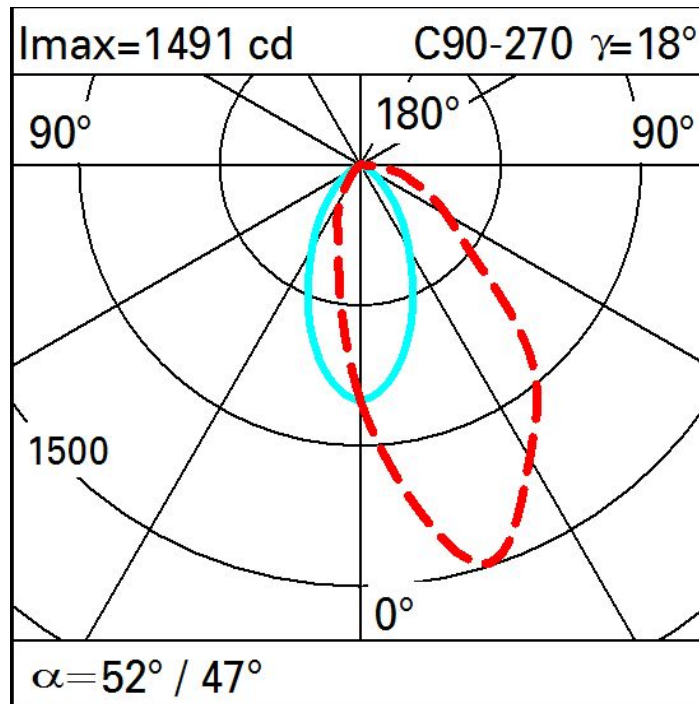

Illuminances

Lux												
						Wall distance = 1m						
3												
	0.2	0.7	3	17	93	210	93	17	3	0.7	0.2	
2	1.0	3	12	42	139	258	139	42	12	3	1.0	
	2	6	18	54	140	201	140	54	18	6	2	
1	4	8	20	49	93	123	93	49	20	8	4	
	4	9	19	37	60	77	60	37	19	9	4	
0												
	m	-2	-1	0	1	2	3					